

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	280LL		Rated Output	200 kW 268 HP			
Type	HS-200/4		Number of Poles	4			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC416(BC)		Starting Method*	■ V.V.V.F.(C.T.:0.06~60Hz or V.T.:0.03~60Hz)			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	312.1 A 361.4 A 624.3 A		
Insulation Class	■ F □ B □ H		Locked-rotor**	630 %	630 % 630 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 94.5 %				
Motor Location ■ Indoor □ Outdoor			75% Load 95.0 %				
Altitude Less than 1000 meter			100% Load 95.0 %				
Relative Humidity Less than 80 %			Power Factor(p.u)				
Ambient Temp. 40 deg. C (Max.)			50% Load 0.860				
Duty Type Continuous (S1)			75% Load 0.880				
Service Factor 1.15			100% Load 0.885				
Mounting ■ B3 □ B5 □ V1 □ B3/B5			Speed at Full Load 1785 r.p.m				
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	NU320 / 6318C3	Full Load 109.1 kg·m				
	Lubricant	Grease(Gadus S2 V 100 2)	Locked-rotor** 170 %				
External Thrust Not applicable			Breakdown** 220 %				
Coupling Method ■ Direct □ V-Belt			Moment of Inertia (J)				
Shaft Extension ■ Single □ Double			Load(Max.) 139.850 kg·m ²				
Terminal Box	Main	□ Steel ■ Cast Iron	Motor 5.488 kg·m ²				
	Aux.	□ Yes ■ No	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	85 dB(A)				
Application			Vibration 2.2 mm/sec (r.m.s)				
Area classification Non-Hazardous			Permissible number of consecutive starts				
Type of Ex-Protection Not applicable			Cold 3 times				
Applicable Standard KS,IEC,NEMA MG1 Part30&31			Hot 2 times				
ACCESSORIES			Paint Munsell No. 4.0PB5.4/5.5(VL-451)				
			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3(Side-Single)	VJ8XZRWP61	1180 kg		
			B3(Top-Single)	VJ8XYRWP61	1240 kg		
			B3(Top-Double)	VJ8XYIOP61	1240 kg		
			Main T-Box Ass'y	3M-016882			
SPARE PARTS			REMARK				
			Inverter Duty&High Efficiency				
			*. For use on PWM VFD 2000:1VT, 1000:1CT@1.0S.F&F Temp. rise				
			*. Blower Motor : 2HP-4P, 440V, 60Hz, IP54, B5				
			Date	DSND	CHKD	CHKD	APPD
			2011-03-22	R. G. KIM	O.J. KIM	J.H. KIM	K.J. KANG

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests.

** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.


Type	:	HVD
Full Load Torque	:	109.1 Kg.m
Motor moment of Inertia (J)	:	5.488 Kg.m ²
Load moment of Inertia (J)	:	139.850 Kg.m ²

200 kW		4 P		60 Hz	
Speed at Full Load :				1785 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	312.1A	361.4A	624.3A		

SPEED VS TORQUE & CURRENT CURVE

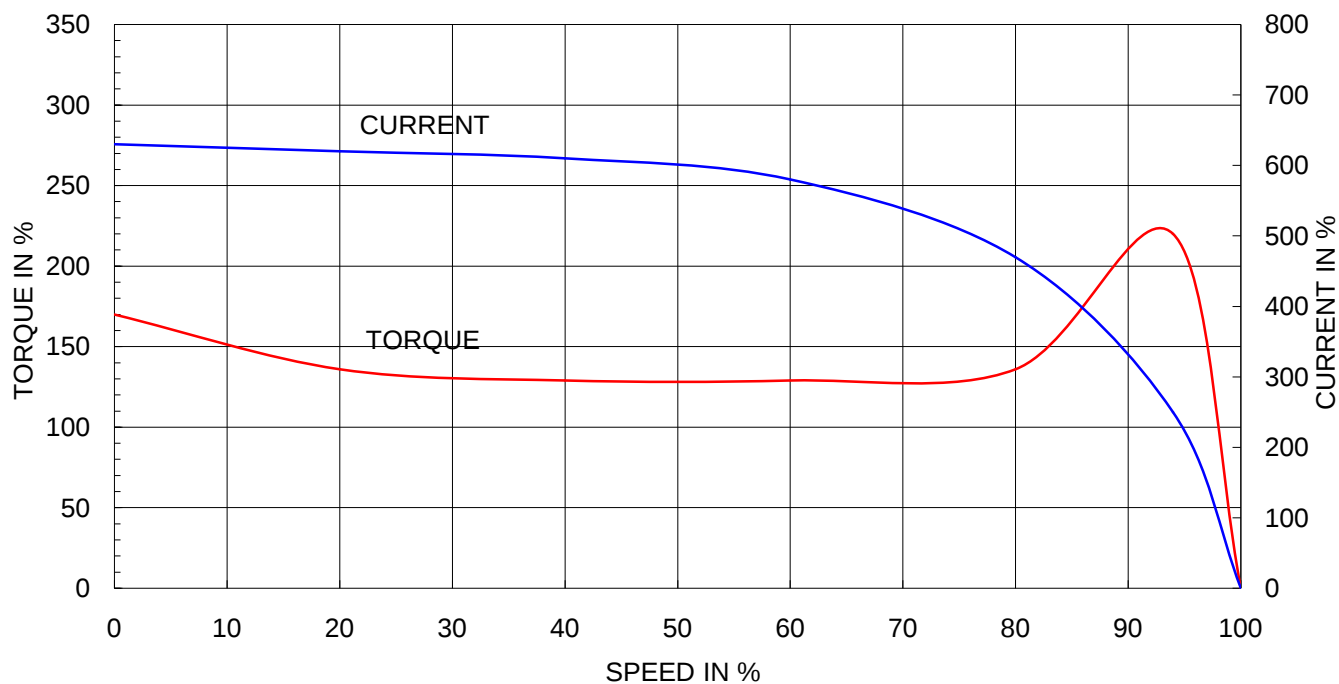

OUTPUT VS EFF., P.F & CURRENT CURVE

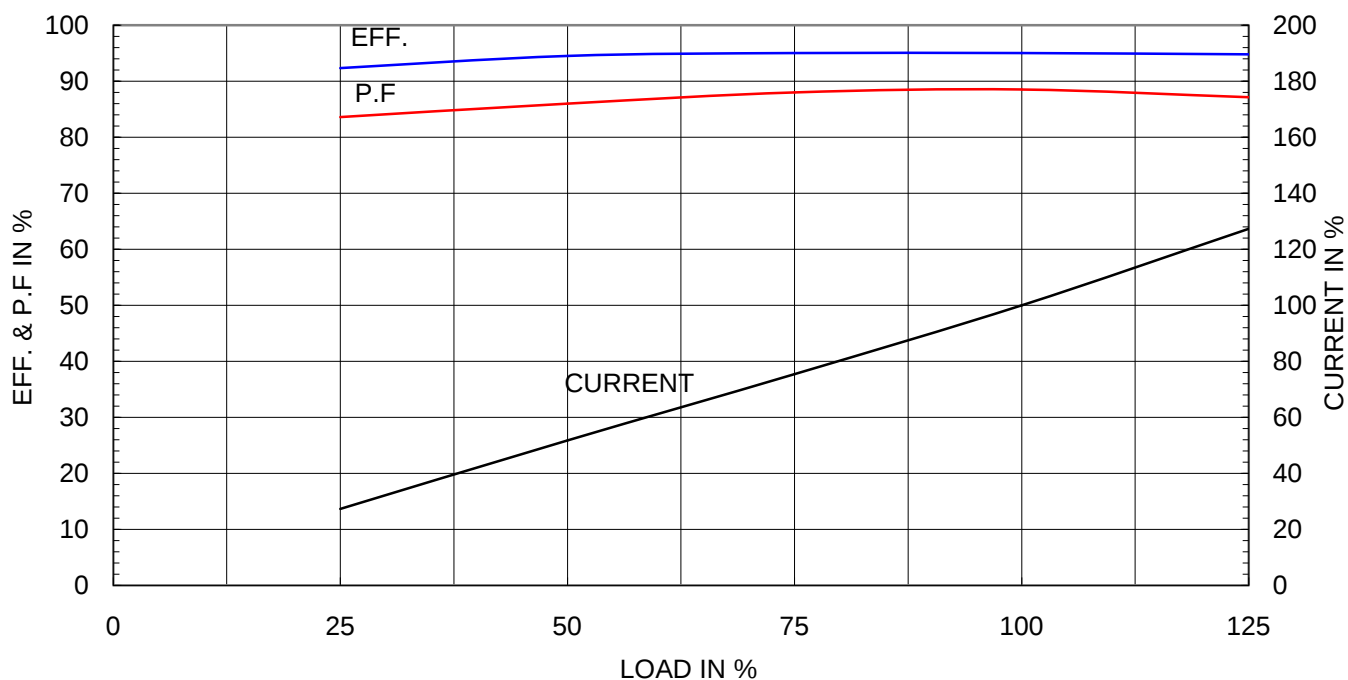





TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HVD


CAST IRON FRAME

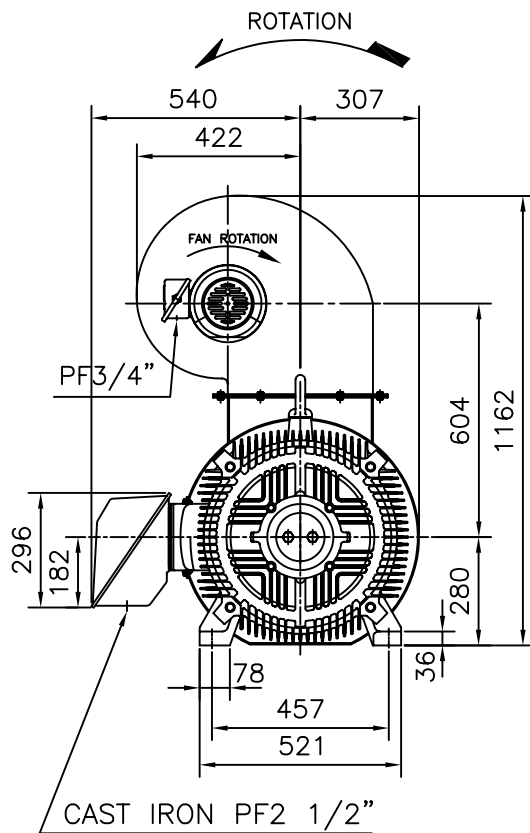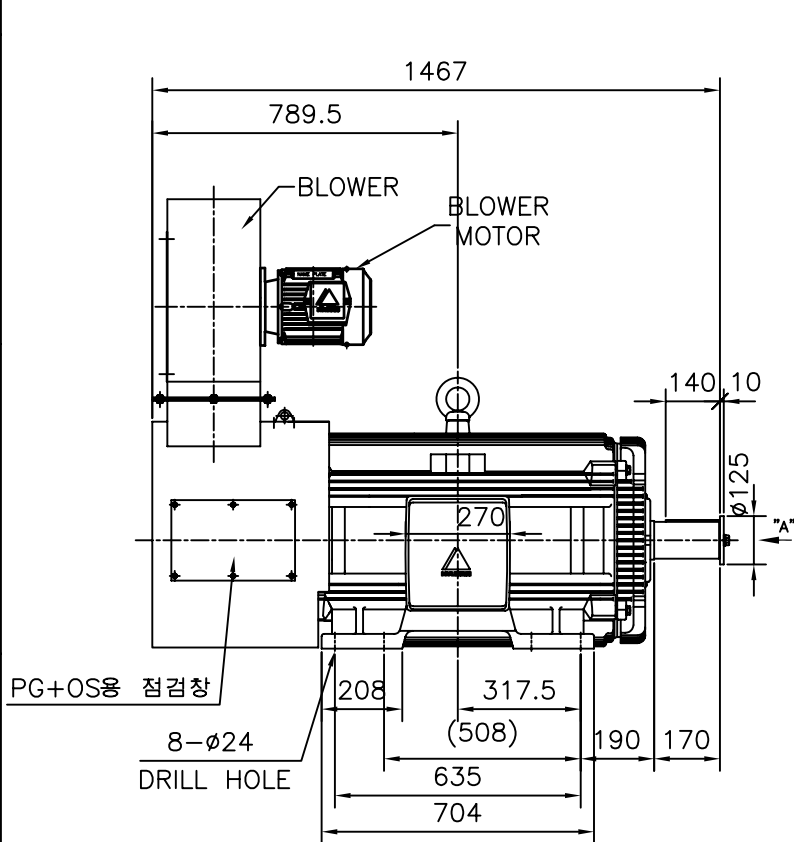

NOTE

1.TOLERANCE :

CENTER HEIGHT	280 ⁰ _{-1.0}
SHAFT DIAMETER	ø95 ^{+0.035} _{+0.013}
KEYWAY WIDTH	25 ^{-0.022} _{-0.074}
KEYWAY DEPTH	9 ^{+0.2} ₀
KEY WIDTH	25 ⁰ _{-0.052}
KEY HEIGHT	14 ⁰ _{-0.110}


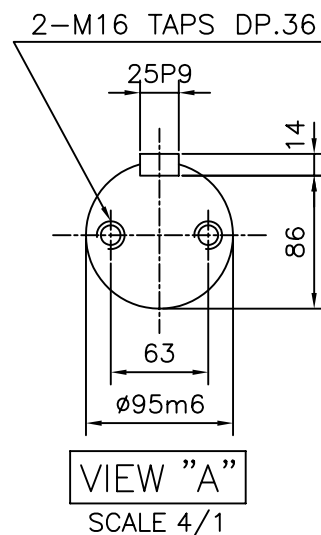


APPD BY	KIM J.H.	UNIT	MM
CHKD BY	KIM O.J.	SCALE	1/20
CHKD BY		PROJEC'N	3rd Angle
DSND BY	KIM RYANG GYU	DATE	2005.12.16



SUBJECT		L2 Fr.280LL-P,TOP SINGLE	
TITLE		OUTLINE THREE-PHASE INDUCTION MOTOR	
REF. NO	L2-Series	Sheet No.	of
DWG NO	VJ8XYRWP61	Revision No.	0

TEBC STANDARD
CAD PROJ \ FILE
MMSTD MTR/VJ8XYRWP61

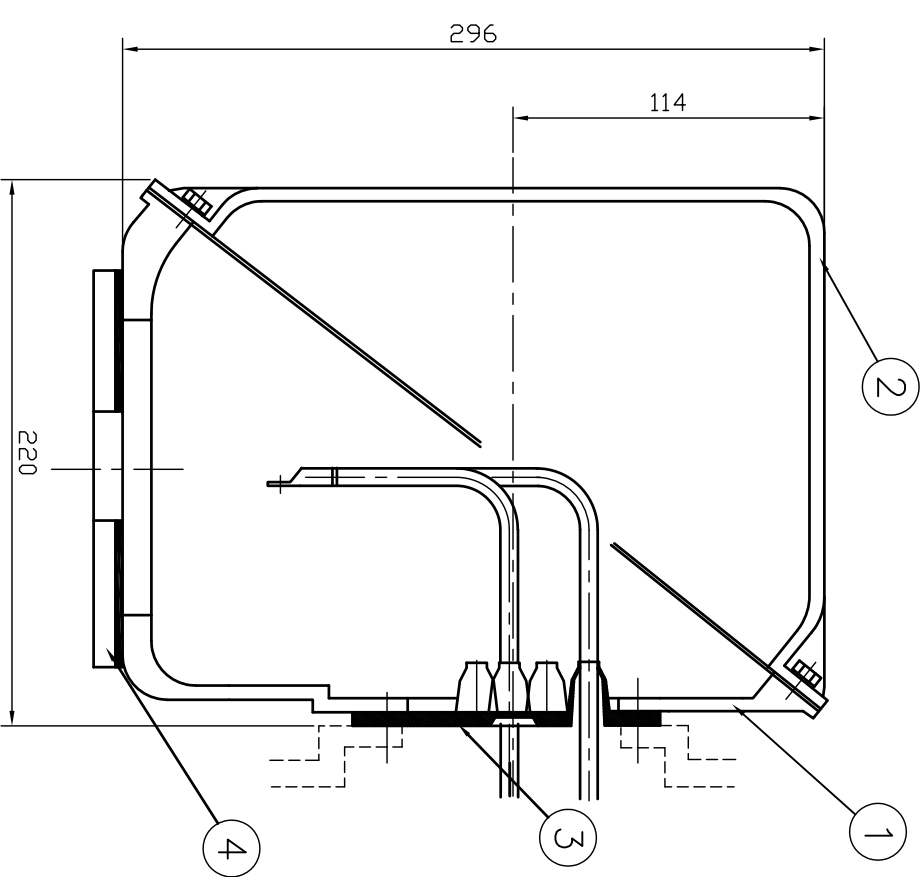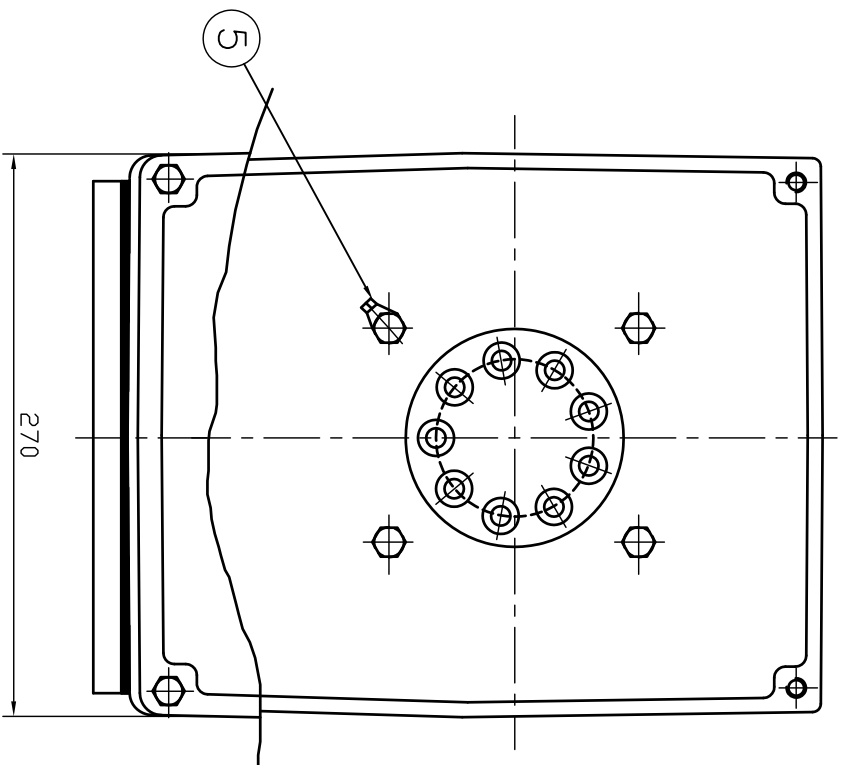

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	Q.P. CHK	APP'D BY
1						

1	EARTH TERMINAL LUG					5
1	CABLE ENTRY PLATE					4
1	GASKET	NBR				3
1	TERMINAL BOX COVER	CAST IRON				2
1	TERMINAL BOX BODY	CAST IRON				1
Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK NO.
APP'D BY	김진오	UNIT	MM			
Q.P. CHK	주영걸	SCALE	NONE			
CHK'D BY	권오철	PROJEC'T	3번(3rd Angle)			
DSND BY	김헌태	DATE	92.06.05			
				SUBJECT	HLA6 - 250,280Fr.	CAD PROJ. & FILE
				TITLE	(CAST IRON)	T-BOX-M \ 38016882
				REF. NO	3M-016882	Sheet No. of
				DWG NO	3M-016882	Revision No.

