

AC INDUCTION MOTOR DATA SHEET


Model No.or RFQ No.		Item No.		Rev. No. [0]	
Project Name		Project No.		Quantity sets	
GENERAL SPECIFICATION			PERFORMANCE DATA		
Frame Size	80M		Rated Output	0.75 kW 1 HP	
Type	HS		Number of Poles	4	
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage	
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ	
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V
Number of Phases	3		Current	Full Load	1.7 A 2.0 A 3.4 A
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	740 %	740 % 740 %
Temp. Rise at full load (by resistance method)			Efficiency		
at 1.0 S.F 80 deg. C			50% Load 76.5 %		
Motor Location	☒ Indoor ☐ Outdoor		75% Load 81.0 %		
Altitude	Less than 1000 meter		100% Load 82.5 %		
Relative Humidity	Less than 80 %		Power Factor(p.u)		
Ambient Temp.	40 deg. C (Max.)		50% Load 0.485		
Duty Type	Continuos (S1)		75% Load 0.610		
Service Factor	1.15		100% Load 0.704		
Mounting	☐ B3 ☐ B5 ☐ V1 ☒ B3/B5		Speed at Full Load 1735 r.p.m		
Bearing	Type	Anti-Friction	Torque		
	DE/N-DE	6204ZZ / 6203ZZ	Full Load 0.4 kg·m		
	Lubricant	Grease(SML4)	Locked-rotor** 360 %		
External Thrust	Not applicable		Breakdown** 390 %		
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)		
Shaft Extension	☒ Single ☐ Double		Load(Max.) 0.625 kg·m²		
Terminal	Main	☐ Steel ☒ Cast Iron	Motor 0.0016 kg·m²		
Box	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)		
	Location	Refer to Outline Drawing	0 dB(A)		
Application			Vibration 1.6 mm/sec (r.m.s)		
Area classification	Non-Hazardous		Permissible number of		
Type of Ex-Protection	Not applicable		Cold 3 times		
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Hot 2 times		
ACCESSORIES			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)
	SUBMITTAL DRAWING				
	Outline Dimension Drawing \ Motor Weight(Approx.)				
	B3				kg
	B5				kg
	V1				kg
	B3/B5		227B5024TA02	14	kg
	Main T-Box Ass'y		227B1537AA		
SPARE PARTS		REMARK High Efficiency			
		* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise			
		Date	DSND	CHKD	CHKD APPD
		2011-04-14	W.H.BACK	S. J. RA	O. J. KIM J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
Inspection and performance test shal


Type	:	HS
Full Load Torque	:	0.4 Kg.m
Motor moment of Inertia (J)	:	0.002 Kg.m ²
Load moment of Inertia (J)	:	0.625 Kg.m ²

0.75 kW		4 P		60 Hz	
Speed at Full Load :				1735 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	1.7A	2.0A	3.4A		

SPEED VS TORQUE & CURRENT CURVE

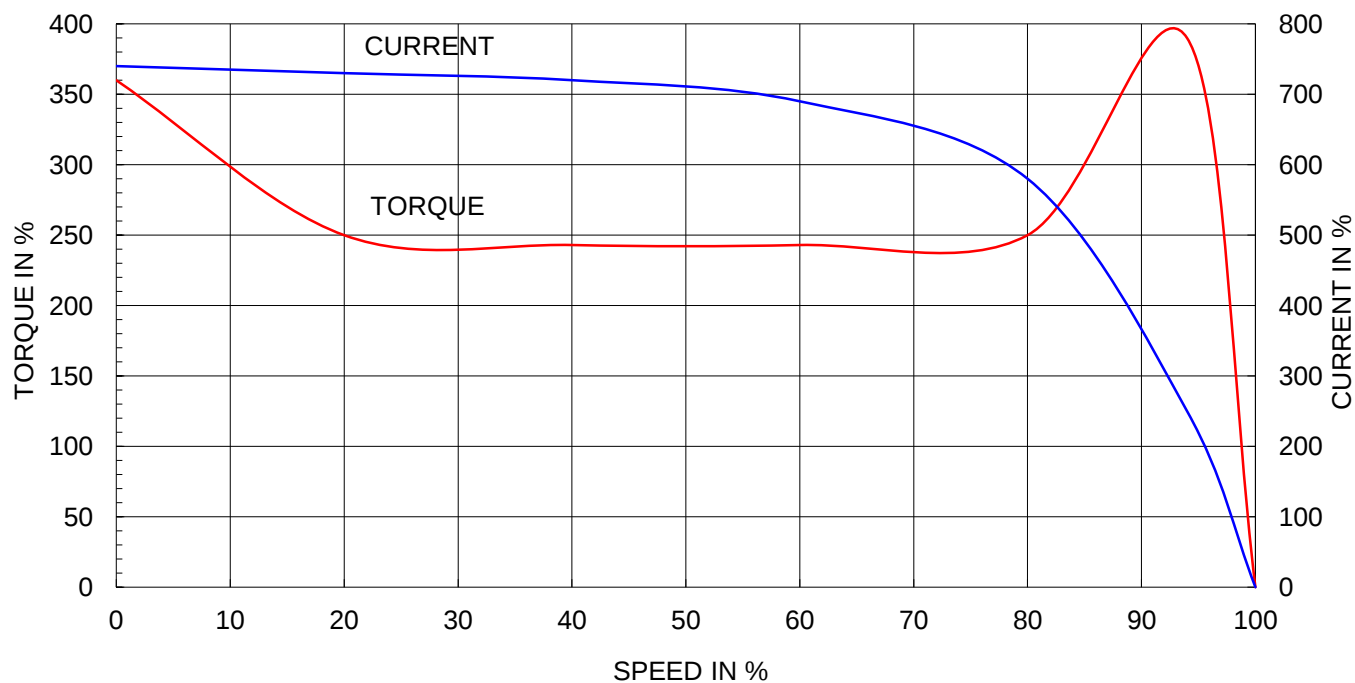

OUTPUT VS EFF., P.F & CURRENT CURVE

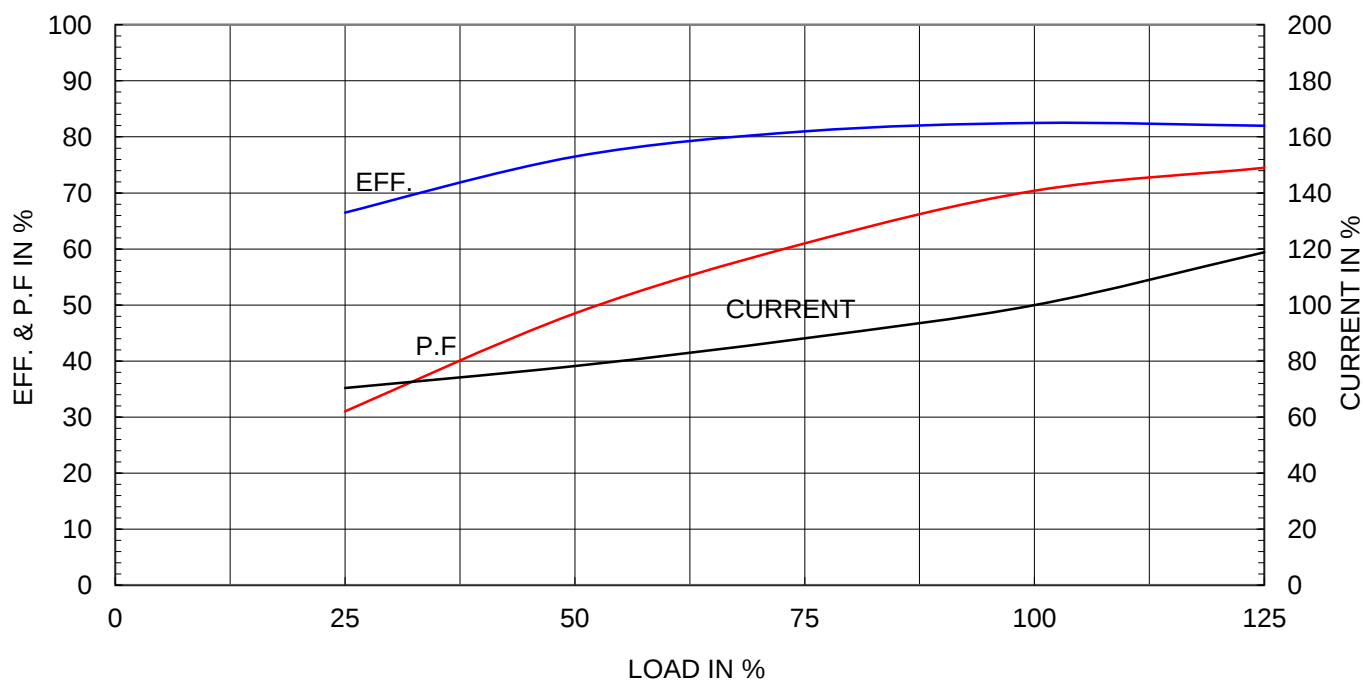




TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HL


AL FRAME

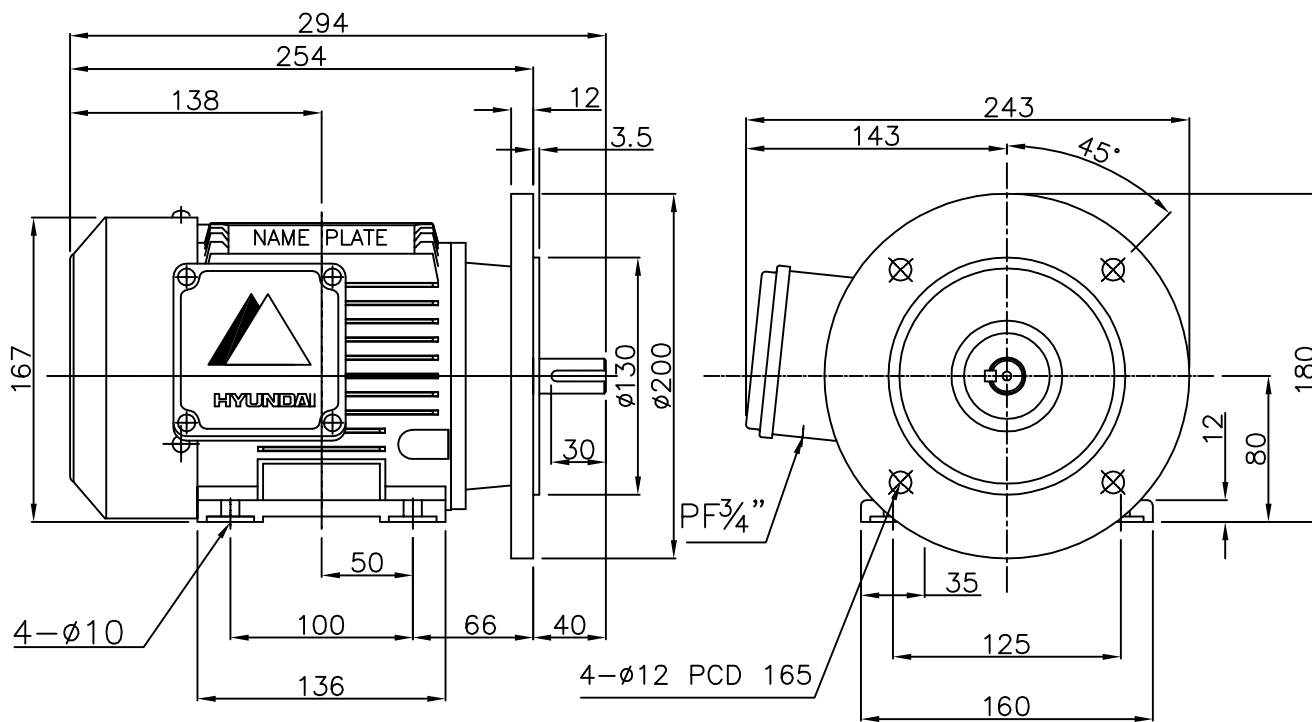

NOTE



1.TOLERANCE :

CENTER HEIGHT	80	$+0$ -0.5
BASE HOLES	$\phi 10$	$+0.36$ -0
SHAFT DIAMETER	$\phi 19$	$+0.009$ -0.004
FLANGE HOLES	$\phi 12$	$+0.43$ -0
RABBET DIAMETER	$\phi 130$	$+0.014$ -0.011
KEYWAY WIDTH	6	$+0$ -0.03
KEYWAY DEPTH	15.5	$+0$ -0.1
KEY SIZE	6*6*30	

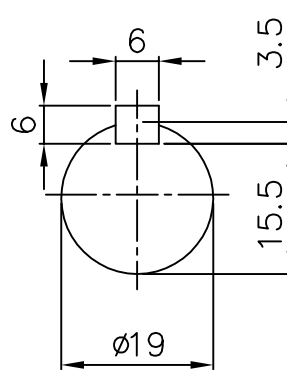

*AL CONDUIT BOX

APPD BY	B.M.YOO	UNIT	mm	SUBJECT	FF165, IEC 80M	CAD PROJ \ FILE
CHKD BY	S.W.SEO	SCALE	1/5	TITLE	OUTLINE	IP54,55,56 B3/B5
CHKD BY	J.S.JEONG	PROJEC'N	3rd Angle			
DSND BY	C.S.KO	DATE	2008.01.12			
				REF. NO	B5024TA02	Sheet No. of
				DWG NO	227B5024TA02	Revision No. 0

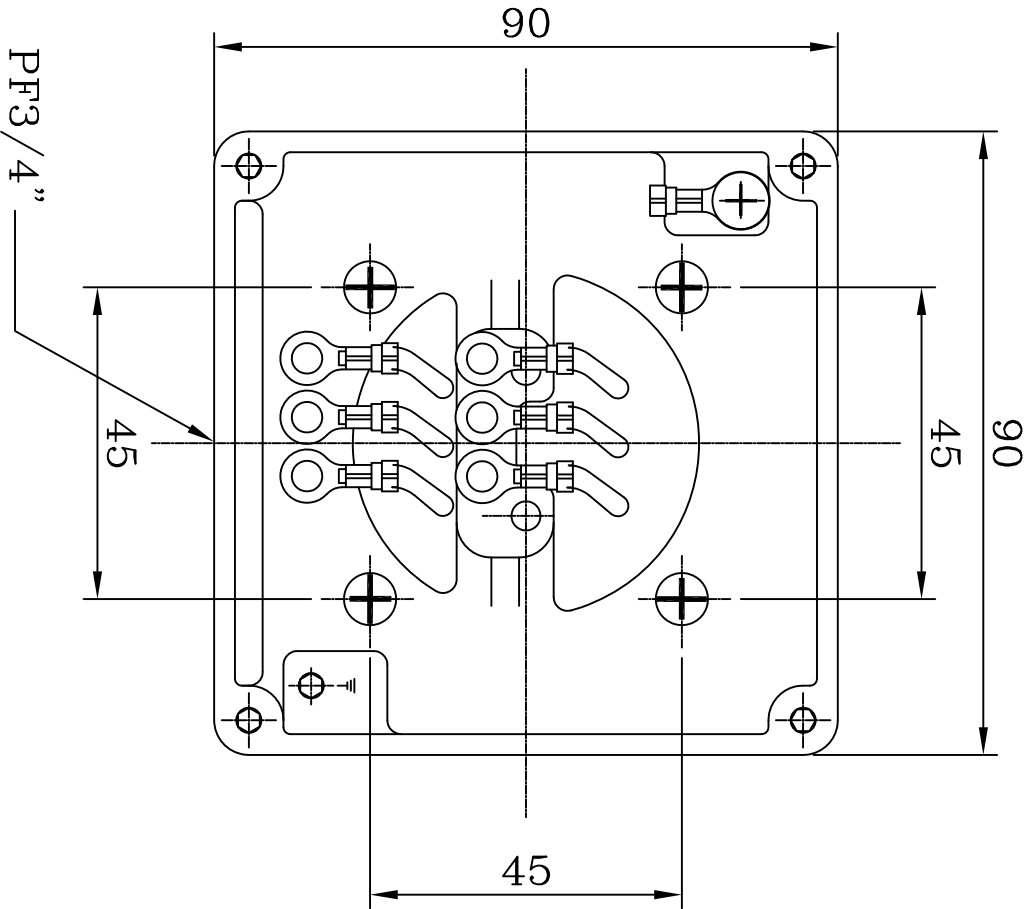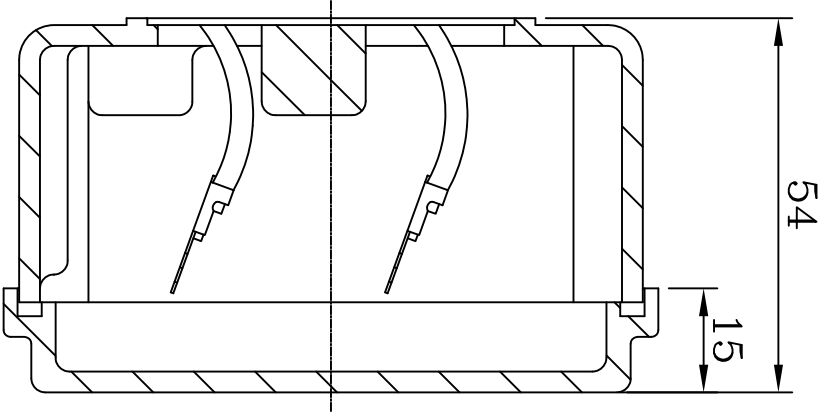

QTY		DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	B. M. YOO	UNIT	MM						
CHKD BY	S. W. SEO	SCALE	1/0.98						
CHKD BY	J. S. JEONG	PROJECN	3 (3rd Angle)						
DSND BY	C. S. KO	DATE	2005.12.05						
TITLE					CONDUIT BOX ASSEMBLY				
6 LEADS									
REF. NO	227B1537AA1	Sheet No.		of					
DWG NO	227B1537AA1	Revision No.		0					