

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	100L		Rated Output	1.5 kW 2 HP			
Type	HS		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load 3.3 A	3.8 A 6.6 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	630 %	630 % 630 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load	85.3 %			
Motor Location	☐ Indoor ☒ Outdoor		75% Load	86.7 %			
Altitude	Less than 1000 meter		100% Load	86.5 %			
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load	0.497			
Duty Type	Continuos (S1)		75% Load	0.614			
Service Factor	1.15		100% Load	0.690			
Mounting	☐ B3 ☐ B5 ☒ V1 ☐ B3/B5		Speed at Full Load	1155 r.p.m			
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6206ZZC3 / 6206ZZC3	Full Load	1.3 kg·m			
	Lubricant	Grease(Polyrex-EM)	Locked-rotor**	180 %			
External Thrust	Not applicable		Breakdown**	240 %			
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.)	3.500 kg·m²			
Terminal Box	Main	☐ Steel ☒ Cast Iron	Motor	0.009 kg·m²			
	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)	60 dB(A)			
	Location	Refer to Outline Drawing	Vibration	1.6 mm/sec (r.m.s)			
Application			Permissible number of consecutive starts	Cold 3 times	Hot 2 times		
Area classification	Non-Hazardous		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
Type of Ex-Protection	Not applicable		SUBMITTAL DRAWING				
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Outline Dimension Drawing \ Motor Weight(Approx.)				
ACCESSORIES			B3		kg		
			B5		kg		
			V1	227B2060AB01	40 kg		
			B3/B5		kg		
			Main T-Box Ass'y	227B8004CB			
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	1.3 Kg.m
Motor moment of Inertia (J)	:	0.009 Kg.m ²
Load moment of Inertia (J)	:	3.500 Kg.m ²


1.5 kW		6 P		60 Hz	
Speed at Full Load :				1155 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	3.3A	3.8A	6.6A		

SPEED VS TORQUE & CURRENT CURVE

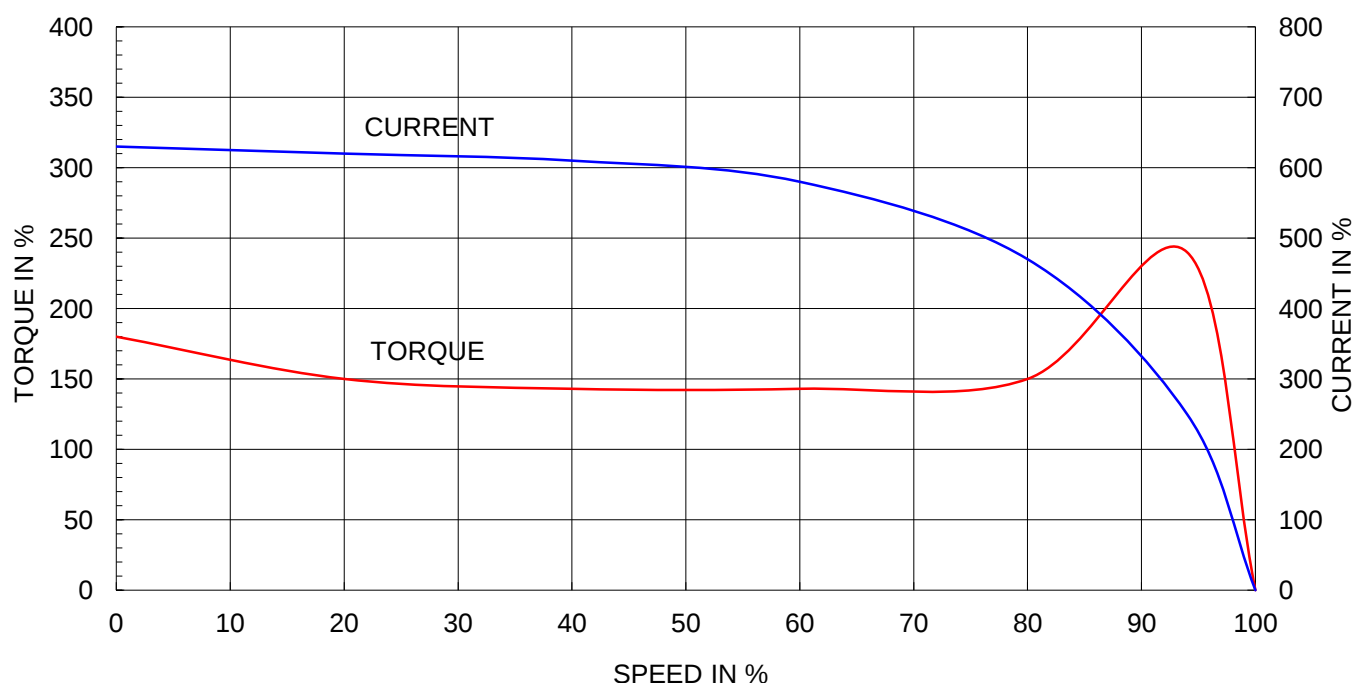


OUTPUT VS EFF., P.F & CURRENT CURVE

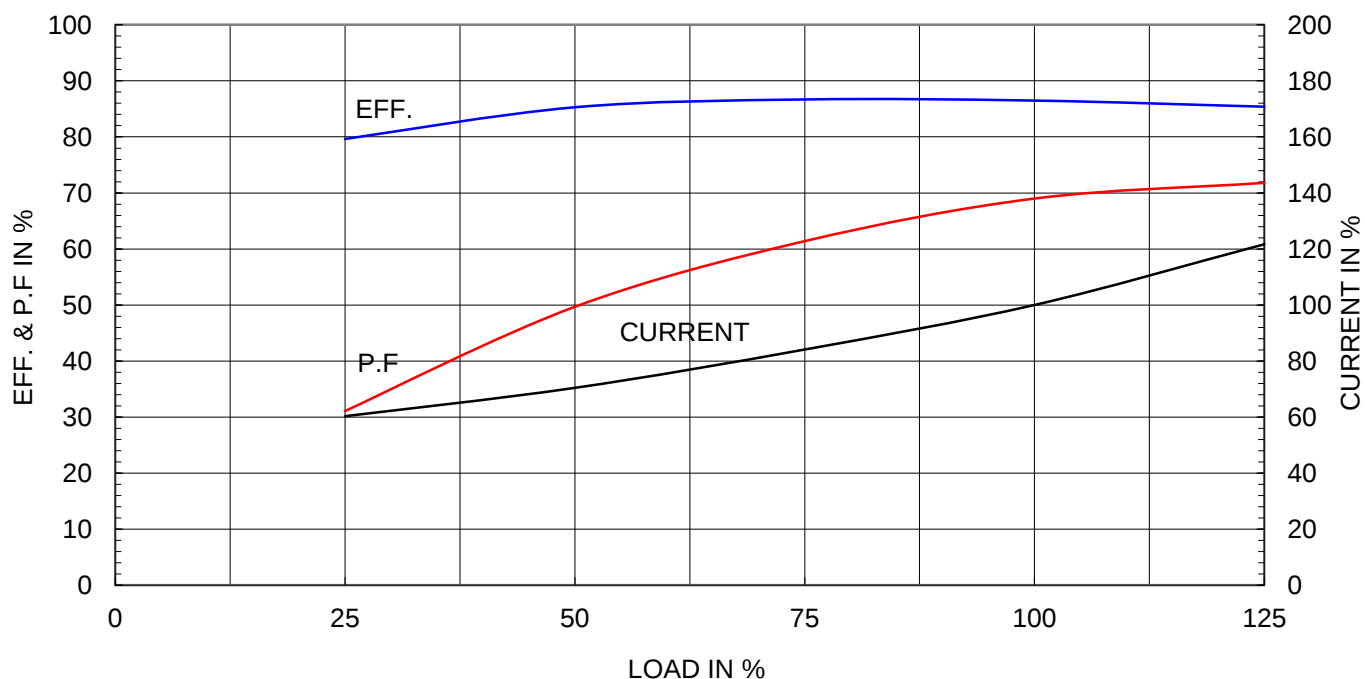

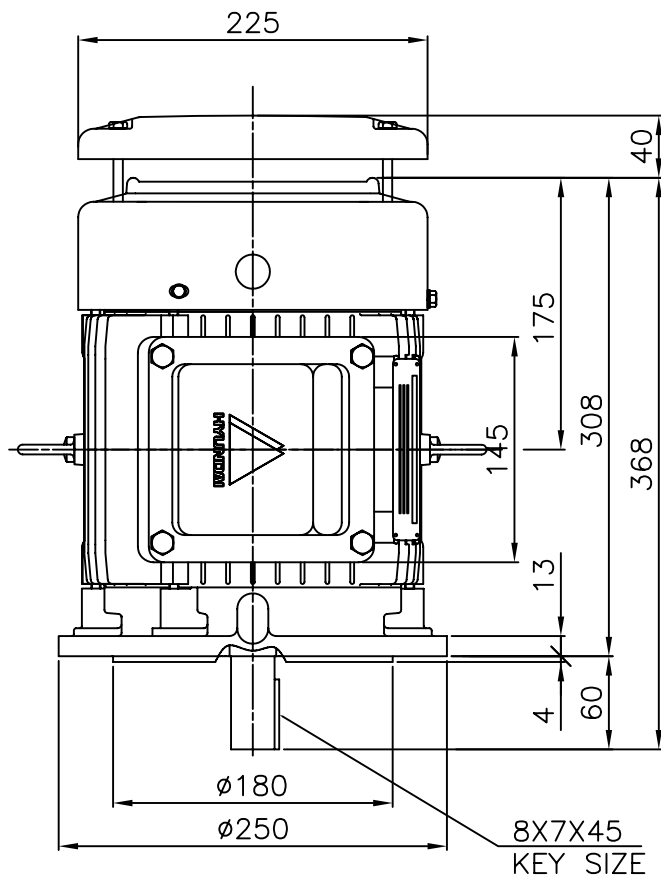

↑
"A"

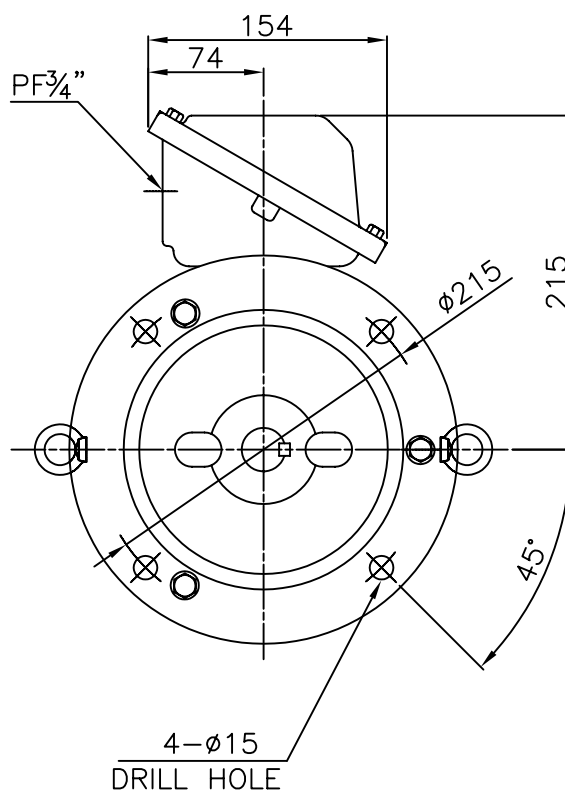

VIEW "A"

NOTE


1.TOLERANCE :

FLANGE HOLES	Ø15	+0.43 0
RABBET DIAMETER	Ø180	+0.014 -0.011
SHAFT DIAMETER	Ø28	+0.009 -0.004
KEYWAY WIDTH	8	0 -0.036
KEYWAY DEPTH	4	+0.2 0


2.REMARK

DRIP COVER WILL BE ATTACHED PER REQUEST FROM CUSTOMER ONLY.

* CAST IRON CONDUIT BOX

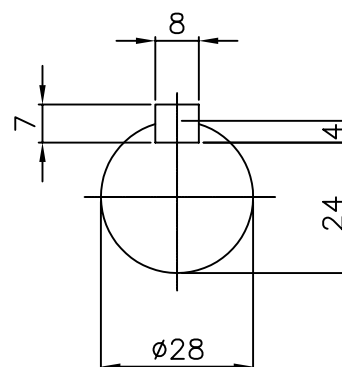

APPD BY	J. H. KIM	UNIT	mm	SUBJECT	KS 100L	CAD PROJ \ FILE
CHKD BY	Y. S. KIM	SCALE	1/5			XSDNKS\B2060AB01
CHKD BY	S. H. KO	PROJEC'N	3rd Angle	TITLE OUTLINE		
DSND BY	I. K. KIM	DATE	2002.10.30			
 HYUNDAI HEAVY INDUSTRIES CO., LTD. Electro-Electric System Division				REF. NO	B2060AB01	Sheet No. of
				DWG NO	227B2060AB01	Revision No. 0

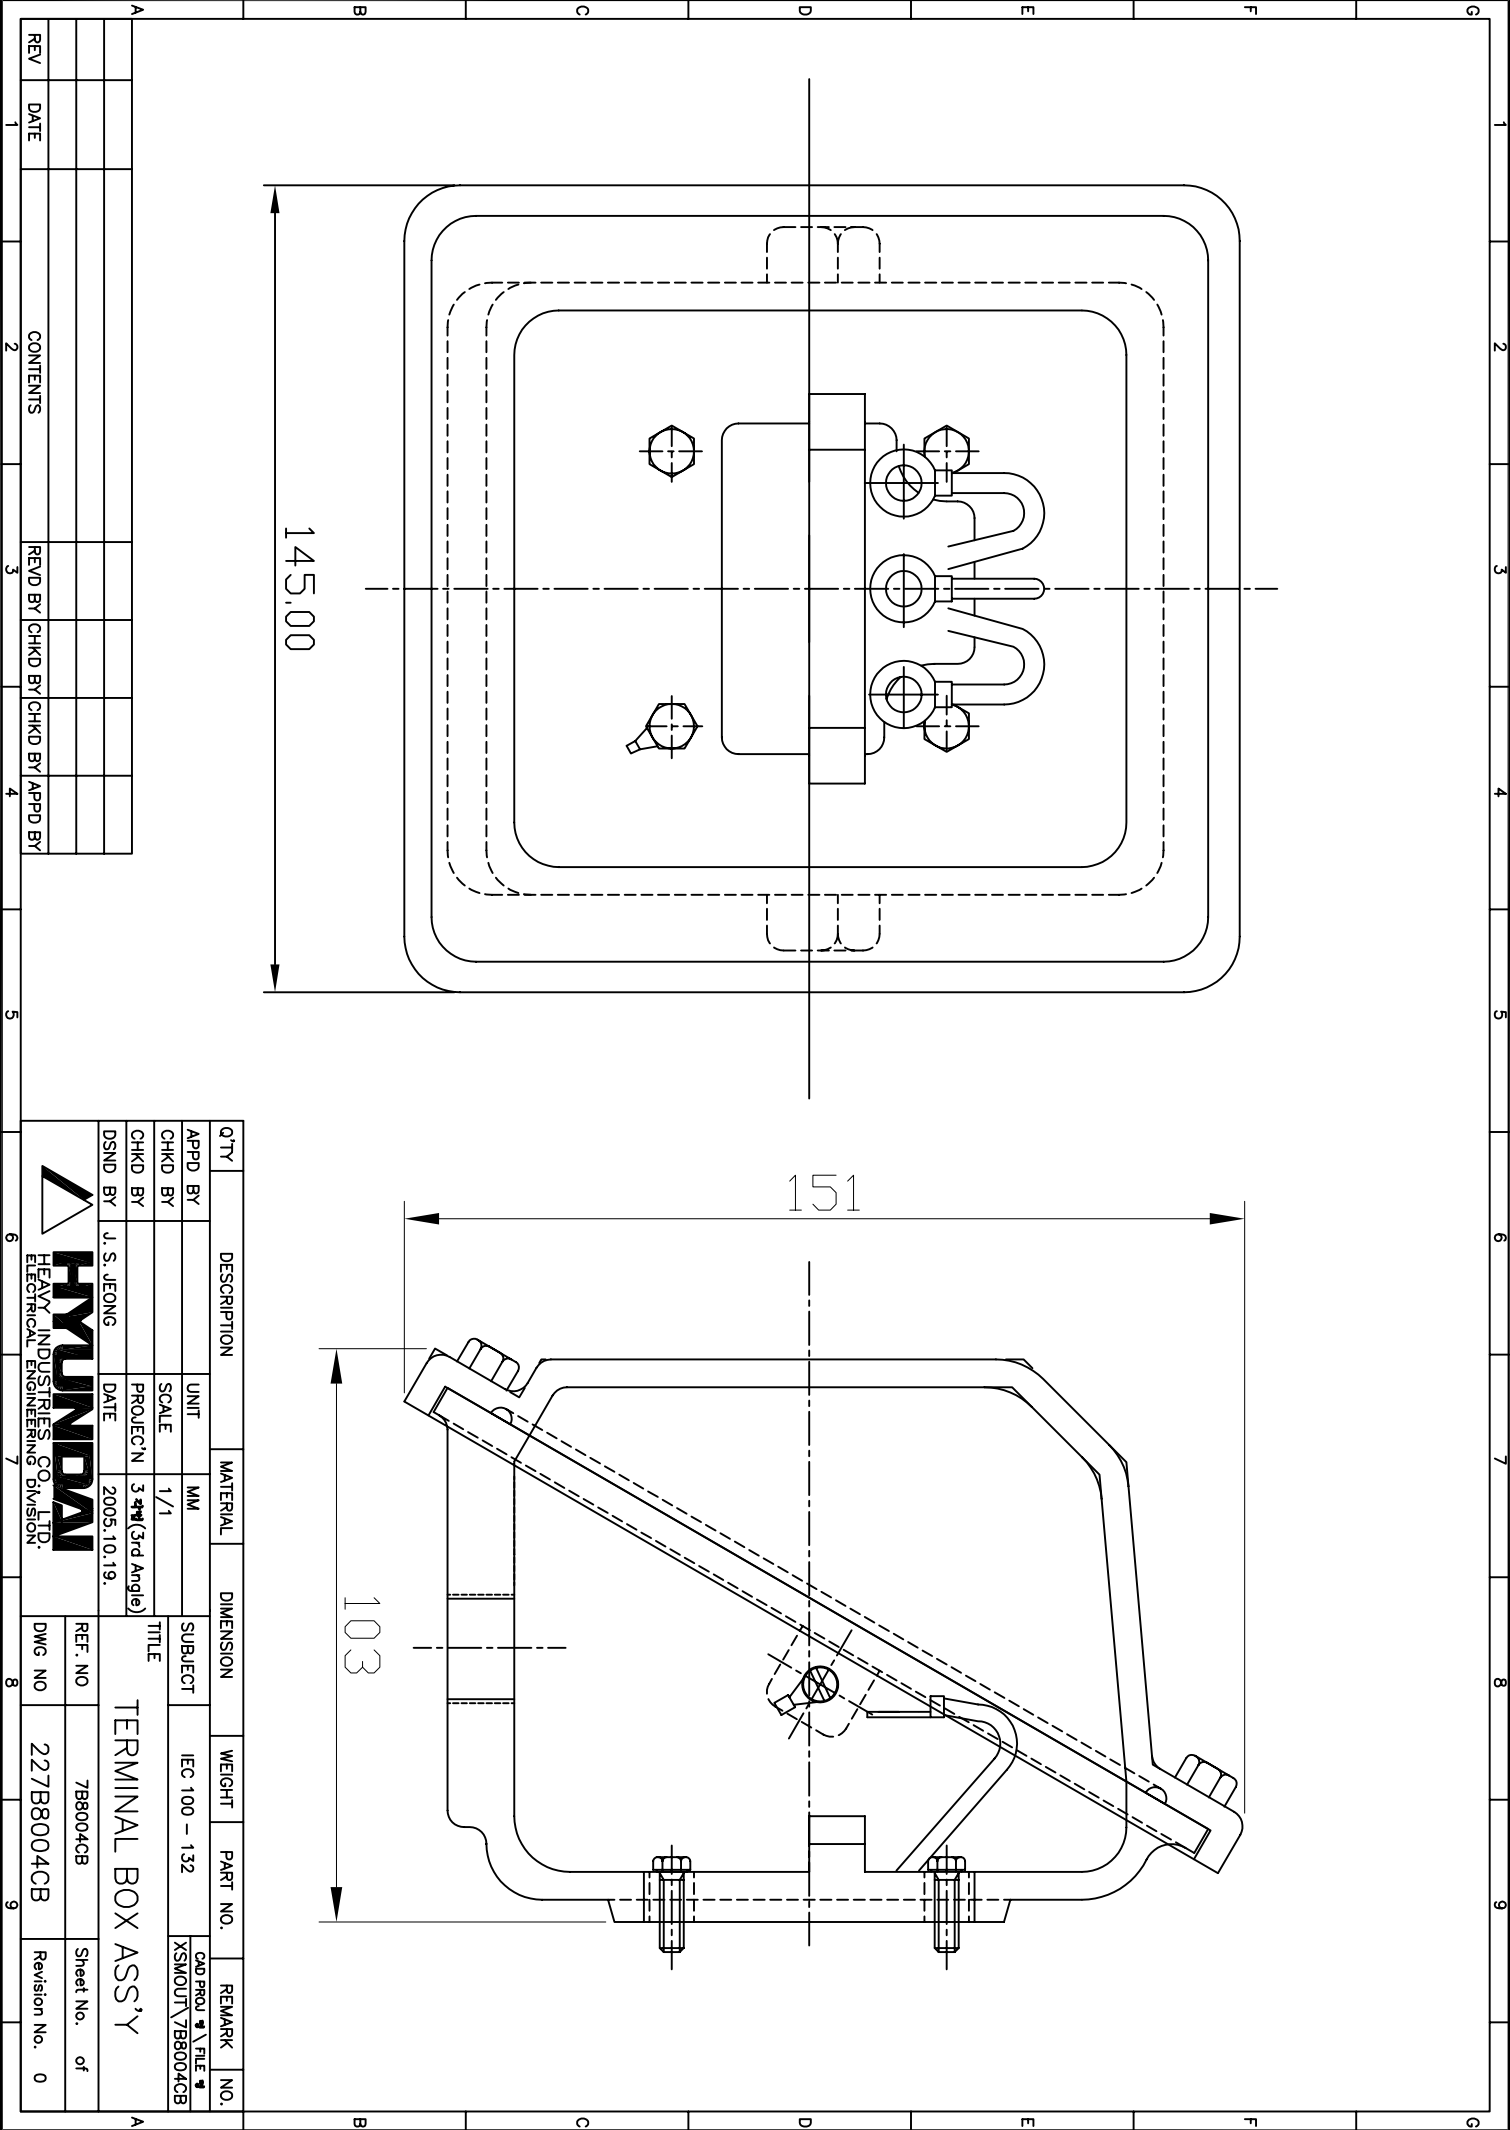

QTY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	UNIT	MM	SUBJECT	IEC 100 - 132	CAD PROJ \FILE		
CHKD BY	SCALE	1/1			XSMOUT\7B8004CB		
CHKD BY	PROJEC'N	3-4#(3rd Angle)	TITLE				
DSND BY	DATE	2005.10.19.	TERMINAL BOX ASS'Y				
J. S. JEONG			REF. NO	7B8004CB	Sheet No.	of	
HYUNDAI			DWG NO	227B8004CB	Revision No.	0	
HEAVY INDUSTRIES CO., LTD.							
ELECTRICAL ENGINEERING DIVISION							