

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	132M		Rated Output	5.5 kW 7.5 HP			
Type	HS		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	11.1 A 12.9 A 22.2 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	600 %	600 % 600 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load	89.0 %			
Motor Location	☒ Indoor ☐ Outdoor		75% Load	89.7 %			
Altitude	Less than 1000 meter		100% Load	89.5 %			
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load	0.544			
Duty Type	Continuos (S1)		75% Load	0.667			
Service Factor	1.15		100% Load	0.725			
Mounting	☒ B3 ☐ B5 ☐ V1 ☐ B3/B5		Speed at Full Load	1165 r.p.m			
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6208ZZC3 / 6208ZZC3	Full Load	4.6 kg·m			
	Lubricant	Grease(Polyrex-EM)	Locked-rotor**	180 %			
External Thrust	Not applicable		Breakdown**	220 %			
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.)	13.000 kg·m²			
Terminal Box	Main	☐ Steel ☒ Cast Iron	Motor	0.052 kg·m²			
	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)	62 dB(A)			
	Location	Refer to Outline Drawing	Vibration	1.6 mm/sec (r.m.s)			
Application			Permissible number of consecutive starts	Cold	3 times		
Area classification	Non-Hazardous		Hot	2 times			
Type of Ex-Protection	Not applicable		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)						
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3	227B2000AB04	70 kg		
			B5		kg		
			V1		kg		
			B3/B5		kg		
			Main T-Box Ass'y	227B8004CB			
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	4.6 Kg.m
Motor moment of Inertia (J)	:	0.052 Kg.m ²
Load moment of Inertia (J)	:	13.000 Kg.m ²

5.5 kW		6 P		60 Hz	
Speed at Full Load :				1165 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	11.1A	12.9A	22.2A		

SPEED VS TORQUE & CURRENT CURVE

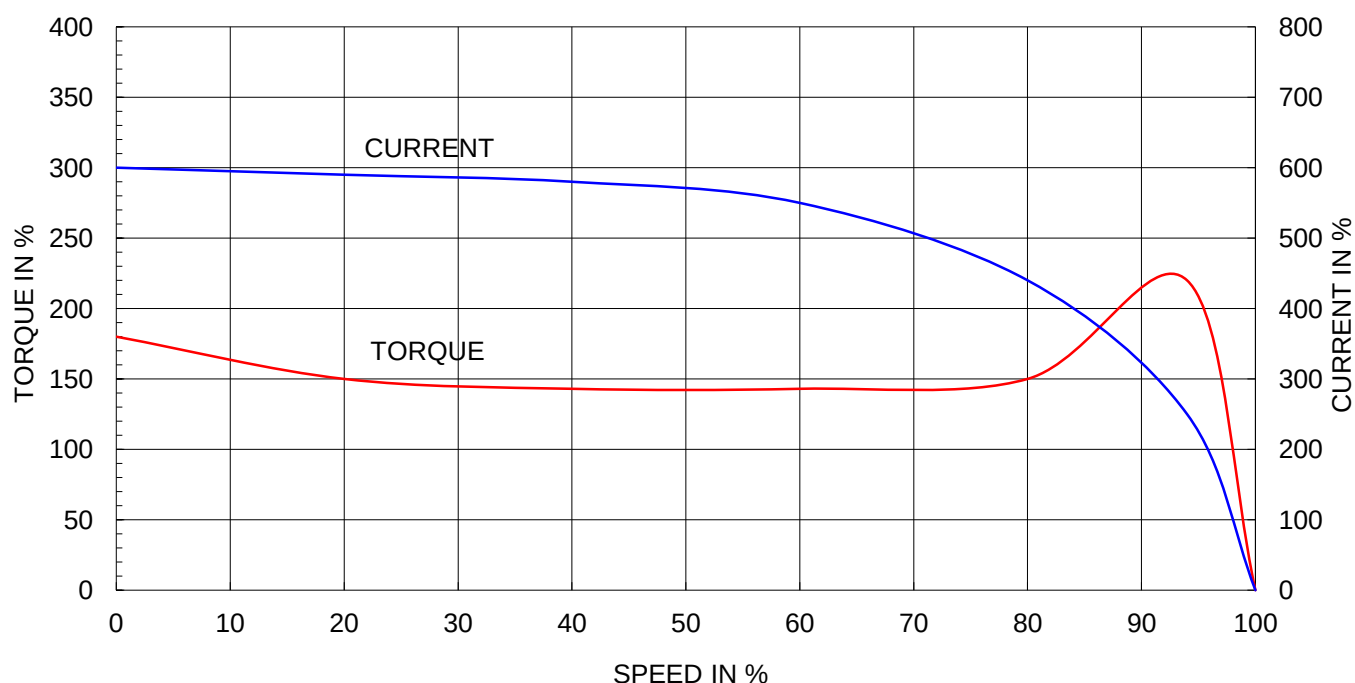

OUTPUT VS EFF., P.F & CURRENT CURVE

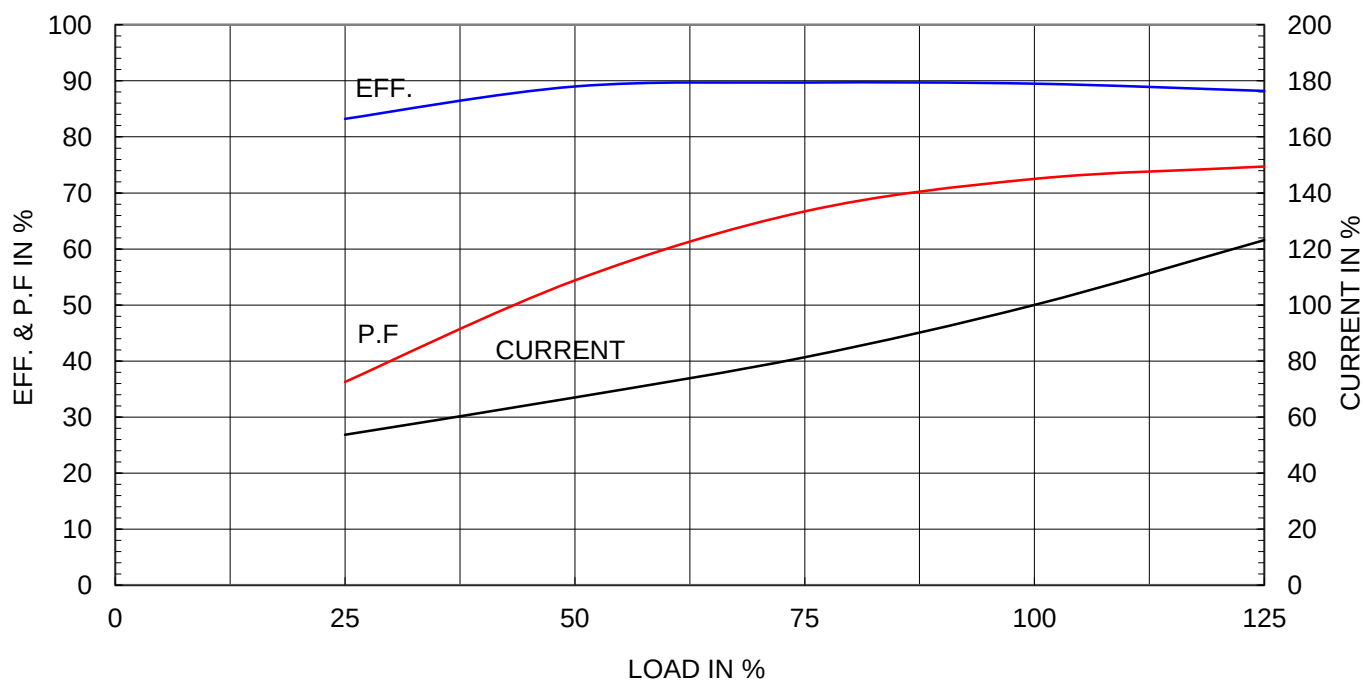





TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HL, HLS


CAST IRON FRAME

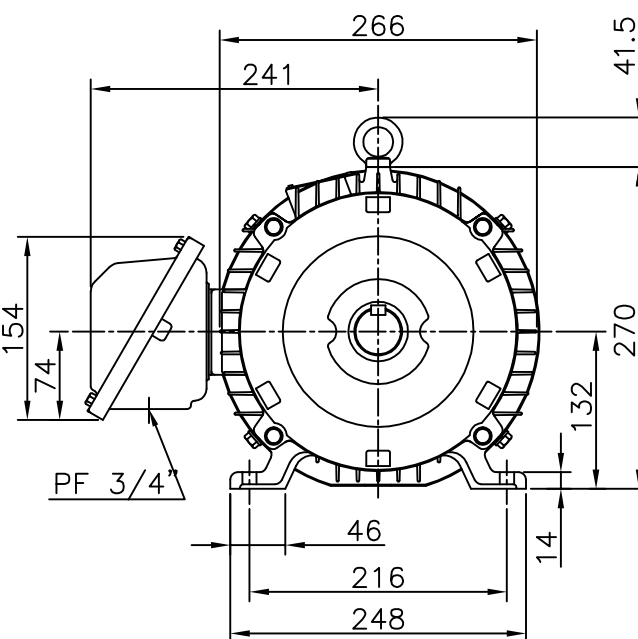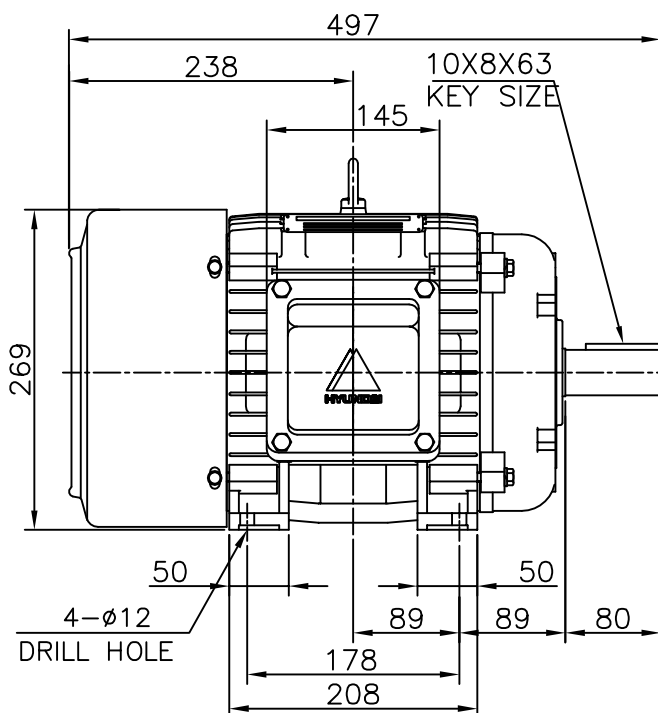

NOTE

1.TOLERANCE :

CENTER HEIGHT	132	$\begin{smallmatrix} 0 \\ -0.5 \end{smallmatrix}$
BASE HOLES	$\phi 12$	$\begin{smallmatrix} +0.43 \\ 0 \end{smallmatrix}$
SHAFT DIAMETER	$\phi 38$	$\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$
KEYWAY WIDTH	10	$\begin{smallmatrix} 0 \\ -0.036 \end{smallmatrix}$
KEYWAY DEPTH	5	$\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$





CAST IRON CONDUIT BOX

APPD BY	J. H. KIM	UNIT	mm
CHKD BY	Y. S. KIM	SCALE	1/6.5
CHKD BY	S. H. KO	PROJEC'N	3rd Angle
DSND BY	I. K. KIM	DATE	2002.10.28



SUBJECT	KS 132M	CAD PROJ \ FILE	XSDNKS\B2000AB04
TITLE	OUTLINE		
REF. NO	B2000AB04	Sheet No.	of
DWG NO	227B2000AB04	Revision No.	0

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

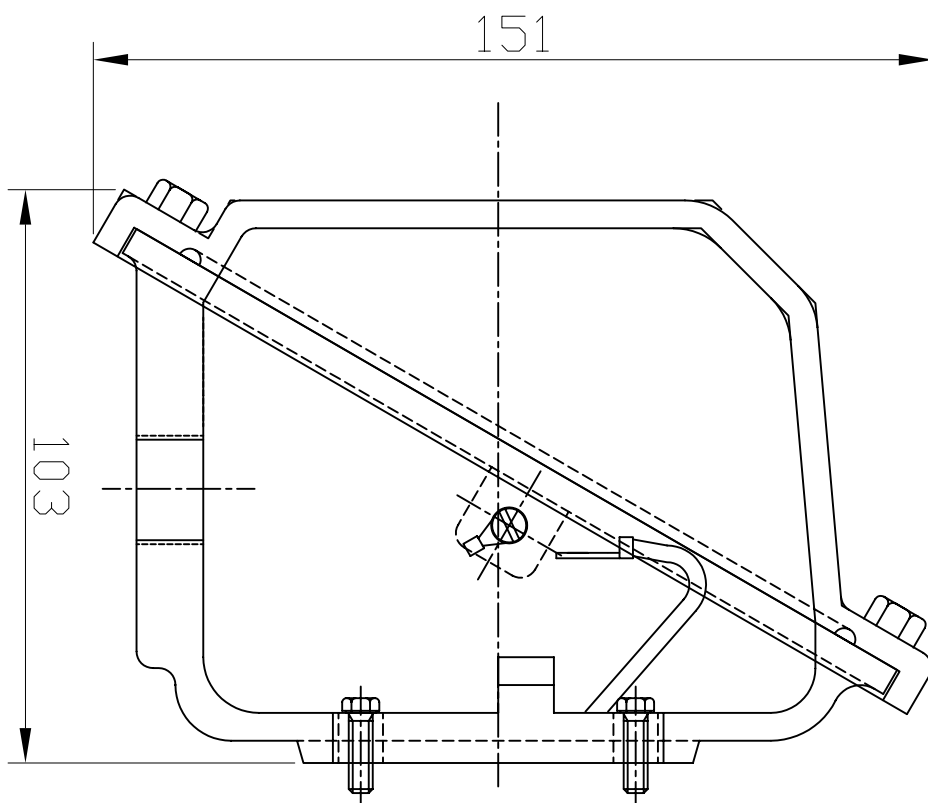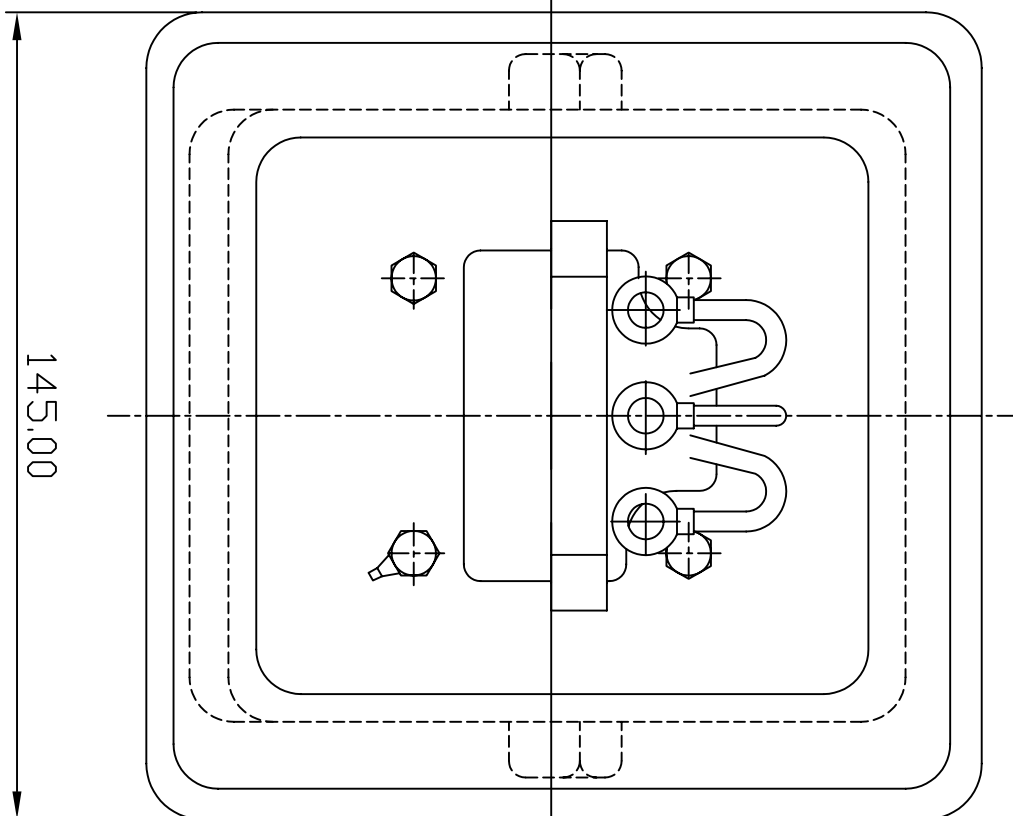

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.	
APPD BY	UNIT	MM	SUBJECT	IEC 100 - 132		CAD PRO. ▽ FILE ▽ XSMOUT ▽ 7B8004CB		
CHKD BY	SCALE	1/1	TITLE TERMINAL BOX ASS'Y					
CHKD BY	PROJ.E'C'N	3-44(3rd Angle)						
DSND BY	DATE	2005.10.19.						
J. S. JEONG			REF. NO	7B8004CB	Sheet No.	of		
 HYUNDAI HEAVY INDUSTRIES CO., LTD. ELECTRICAL ENGINEERING DIVISION			DWG NO	227B8004CB	Revision No.	0		