





TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HL, HLS


CAST IRON FRAME

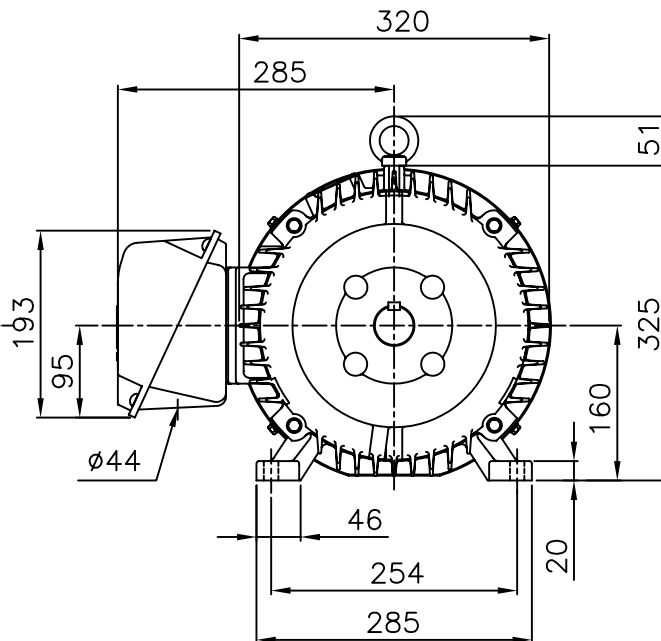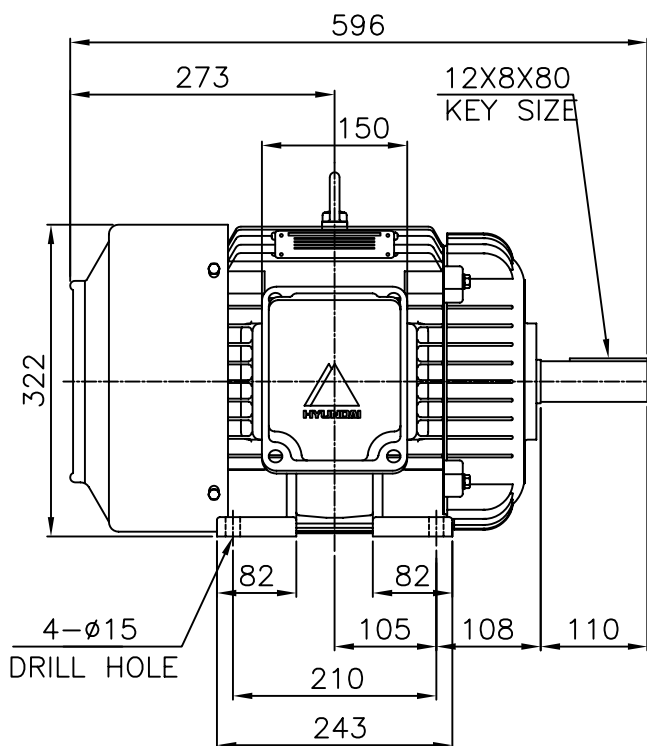

NOTE

1.TOLERANCE :

CENTER HEIGHT	160	$\begin{smallmatrix} 0 \\ -0.5 \end{smallmatrix}$
BASE HOLES	ø15	$\begin{smallmatrix} +0.43 \\ 0 \end{smallmatrix}$
SHAFT DIAMETER	ø42	$\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$
KEYWAY WIDTH	12	$\begin{smallmatrix} 0 \\ -0.043 \end{smallmatrix}$
KEYWAY DEPTH	5	$\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$



* STEEL CONDUIT BOX

APPD BY	J. H. KIM	UNIT	mm	SUBJECT	KS 160M	CAD PROJ \ FILE
CHKD BY	Y. S. KIM	SCALE	1/8			XSDNKS\B2000AA05
CHKD BY	S. H. KO	PROJEC'N	3rd Angle	TITLE	OUTLINE	
DSND BY	I. K. KIM	DATE	2001.10.27	REF. NO	B2000AA05	Sheet No. of
 HEAVY INDUSTRIES CO., LTD. Electro-Electric System Division				DWG NO	227B2000AA05	Revision No. 0