

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	132S		Rated Output	3.7 kW 5 HP			
Type	HL-XP		Number of Poles	6			
Enclosure(Protection)	Explosion Proof (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load 7.5 A	8.7 A 15.1 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	600 %	600 % 600 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 86.8 %				
Motor Location	☒ Indoor ☐ Outdoor		75% Load 87.9 %				
Altitude	Less than 1000 meter		100% Load 87.5 %				
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load 0.551				
Duty Type	Continuos (S1)		75% Load 0.676				
Service Factor	1.00		100% Load 0.735				
Mounting	☒ B3 ☐ B5 ☐ V1 ☐ B3/B5		Speed at Full Load 1165 r.p.m				
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6208ZZC3 / 6208ZZC3	Full Load 3.1 kg·m				
	Lubricant	Grease(Polyrex-EM)	Locked-rotor** 180 %				
External Thrust	Not applicable		Breakdown** 220 %				
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.) 7.750 kg·m²				
Terminal Box	Main	☐ Steel ☒ Cast Iron	Motor 0.040 kg·m²				
	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	62 dB(A)				
Application			Vibration 1.6 mm/sec (r.m.s)				
Area classification	Hazardous		Permissible number of consecutive starts				
Type of Ex-Protection	Ex d IIB T4		Cold 3 times				
Applicable Standard	KS,IEC		Hot 2 times				
			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3	227B2002AA03	79 kg		
			B5		kg		
			V1		kg		
			B3/B5		0 kg		
			Main T-Box Ass'y 227B1470LC				
SPARE PARTS			REMARK				
			High Efficiency				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM


Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HL-XP
Full Load Torque :	3.1	Kg.m
Motor moment of Inertia (J) :	0.040	Kg.m ²
Load moment of Inertia (J) :	7.750	Kg.m ²

3.7 kW		6 P		60 Hz	
Speed at Full Load :				1165 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	7.5A	8.7A	15.1A		

SPEED VS TORQUE & CURRENT CURVE

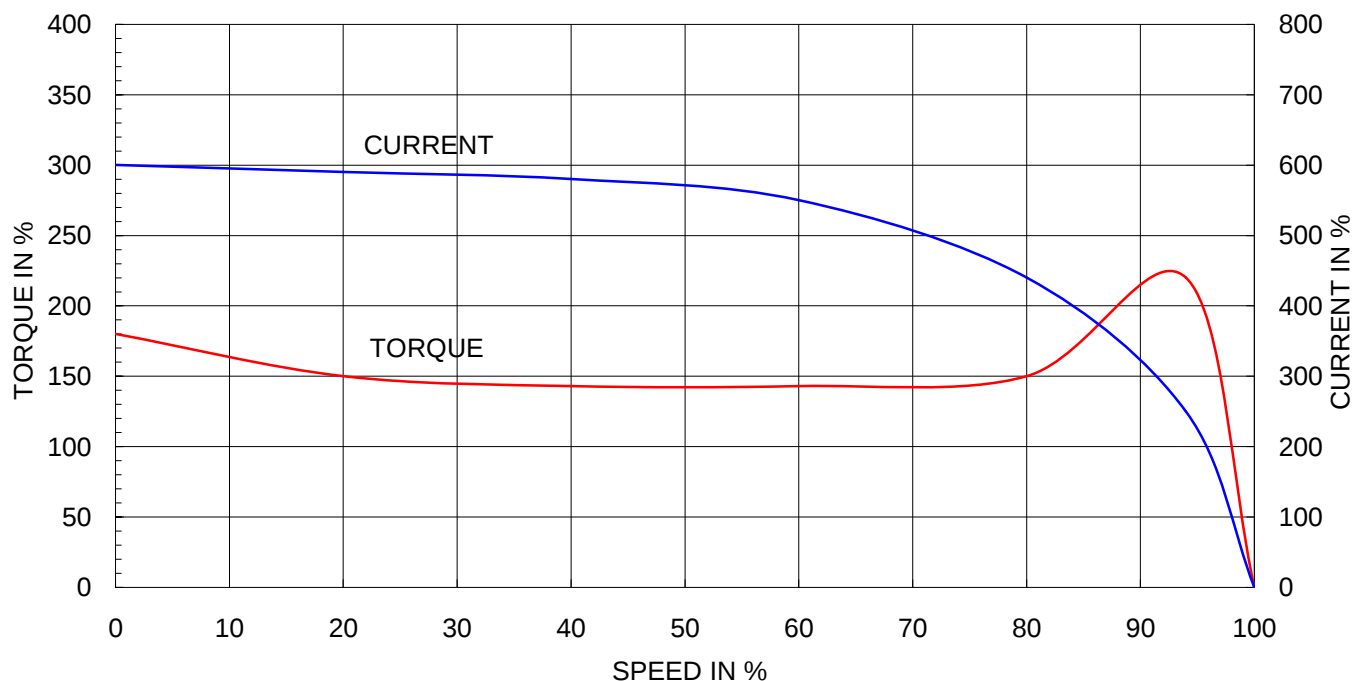

OUTPUT VS EFF., P.F & CURRENT CURVE

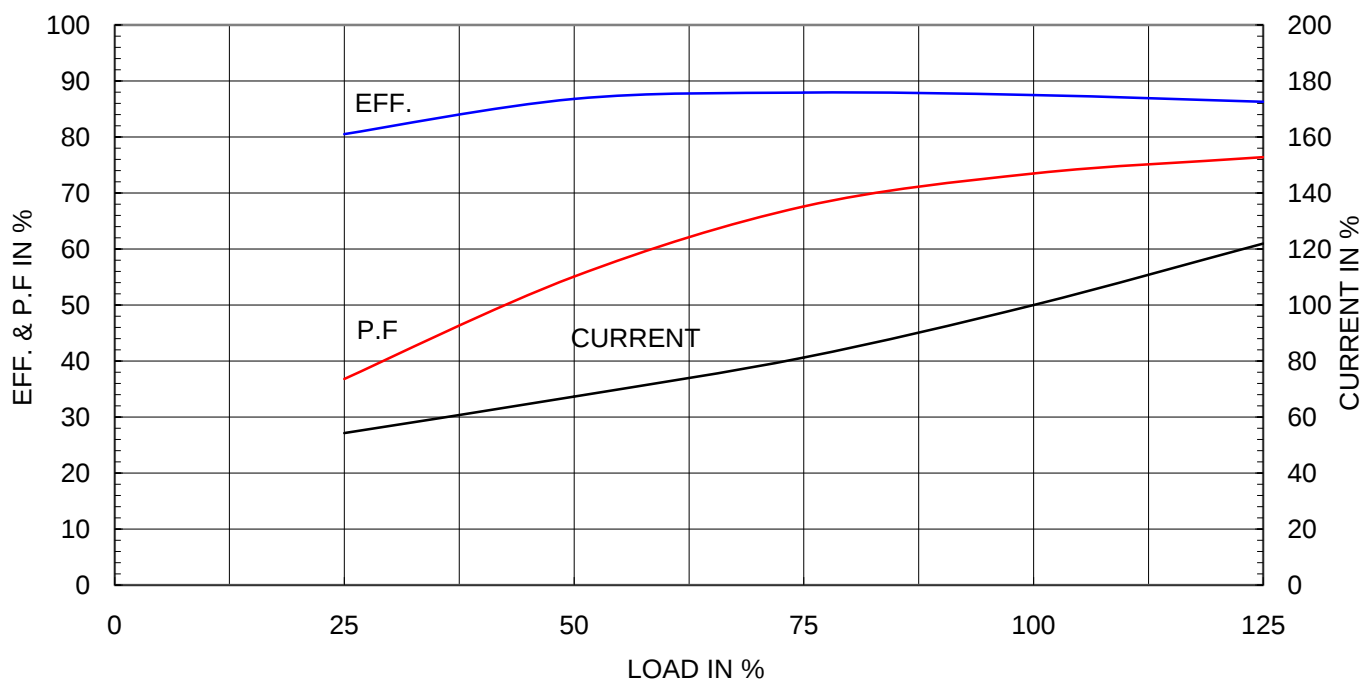



TEFC


THREE PHASE INDUCTION MOTOR

TYPE

HL, HLS

CAST IRON FRAME


Exd II

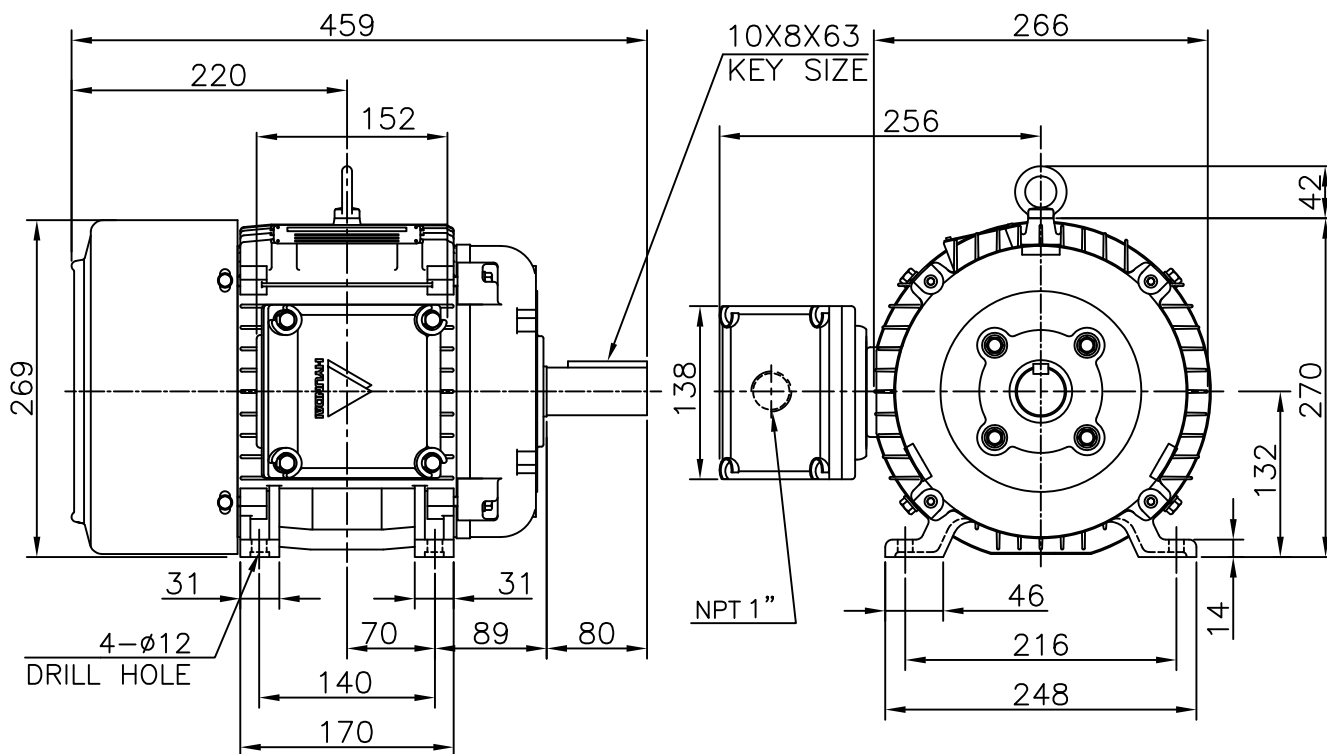


NOTE

1.TOLERANCE :

CENTER HEIGHT	132	$\begin{smallmatrix} 0 \\ -0.5 \end{smallmatrix}$
BASE HOLES	$\phi 12$	$\begin{smallmatrix} +0.43 \\ 0 \end{smallmatrix}$
SHAFT DIAMETER	$\phi 38$	$\begin{smallmatrix} +0.018 \\ +0.002 \end{smallmatrix}$
KEYWAY WIDTH	10	$\begin{smallmatrix} 0 \\ -0.036 \end{smallmatrix}$
KEYWAY DEPTH	5	$\begin{smallmatrix} +0.2 \\ 0 \end{smallmatrix}$



APPD BY	B. M. YOO	UNIT	mm	SUBJECT	KS 132S	CAD PROJ \ FILE	
CHKD BY		SCALE	1/6.5			XSDNKS\B2002AA04	
CHKD BY	S. W. SEO	PROJEC'N	3rd Angle	TITLE	OUTLINE		
DSND BY	J. S. JEONG	DATE	2008.06.27.	REF. NO	B2002AA03	Sheet No.	of
 HEAVY INDUSTRIES CO., LTD. Electro-Electric System Division				DWG NO	227B2002AA03	Revision No.	0

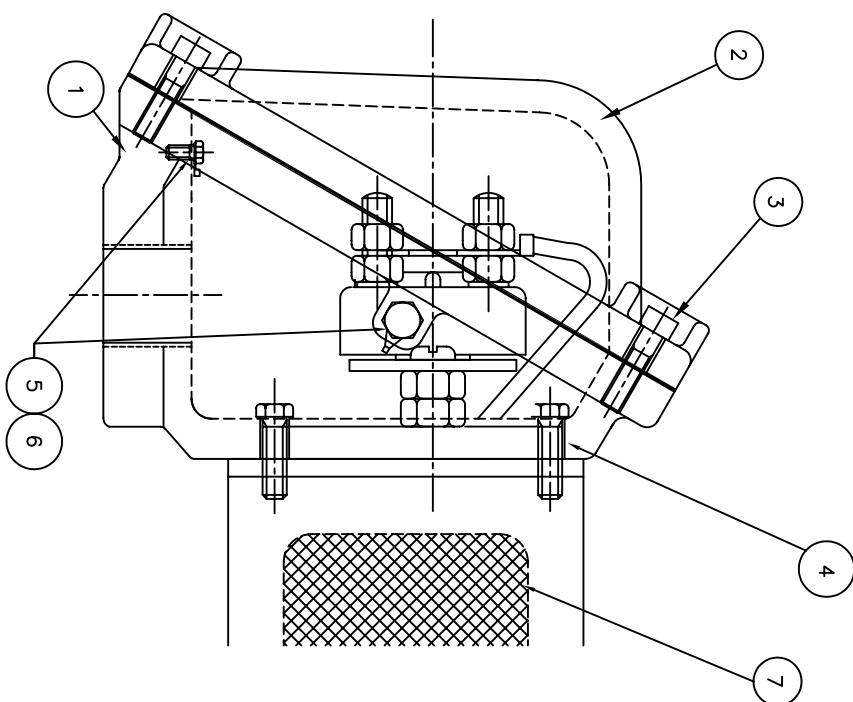[illegible]