

Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR



Contents

1 . Data Sheet of AC Induction Motor	- 1Sheets
2 . Speed-Torque & Current Curve	- 1Sheets
3 . Outline Dimension Drawing	- 1Sheets
4 . Main Terminal Box Drawing	- 1Sheets

		AC INDUCTION MOTOR DATA SHEET							
Model No.or RFQ No.		4406KSTD40SSDS1STFE3V11DL0SDS		Item No.		Rev. No.		[]	
Project Name				Project No.		Quantity			
GENERAL SPECIFICATION				PERFORMANCE DATA					
Frame Size		100L		Rated Output		1.5 kW		2 HP	
Type		HLP-1.5/6		Number of Poles		6			
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage			
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L ☐ Y-Δ			
Rated Frequency		60 Hz		Rated Voltage		440 V			
Number of Phases		3		Current		Full Load		3.2 A	
Insulation Class		☒ F ☐ B ☐ H				Locked-rotor**		790 %	
Temp. Rise at full load (by resistance method)				Efficiency					
at 1.0 S.F		80 deg. C				50% Load		87.4 %	
Motor Location		☒ Indoor ☐ Outdoor				75% Load		88.7 %	
Altitude		Less than 1000				100% Load		88.5 %	
Relative Humidity		Less than 80 %		Power Factor(p.u)					
Ambient Temp.		40 deg. C (Max.)				50% Load		0.500	
Duty Type		Continuous(S1)				75% Load		0.620	
Service Factor		1.15				100% Load		0.700	
Mounting		☐ B3 ☐ B5 ☒ V1 ☐ B3/B5		Speed at Full Load		1155 r.p.m			
Bearing	Type	Anti-Friction		Torque					
	DE/N-DE	6206ZZC3 / 6206ZZC3				Full Load		1.3 kg·m	
	Lubricant	Grease(SML4)				Locked-rotor**		180 %	
External Thrust		Not applicable				Breakdown**		260 %	
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)					
Shaft Extension		☒ Single ☐ Double				Load(Max.)		3.500 kg·m²	
Terminal Box	Main	☐ Steel ☒ Cast Iron				Motor		0.009 kg·m²	
	Aux.	☐ Yes ☒ No		Sound Pressure Level (No-load & mean value at 1m from motor)					
	Location	Refer to Outline Drawing				60 dB(A)			
Application				Vibration		1.6 mm/sec (r.m.s)			
Area classification		Not applicable		Permissible number of consecutive starts		Cold 3 times		Hot 2 times	
Type of Ex-Protection		Non-Hazardous		Paint		Munsell No.		4.4PB5.5/5.6(VL-451)	
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)							
ACCESSORIES				SUBMITTAL DRAWING					
				Outline Dimension Drawing		Motor Weight(Approx.)			
				V1		LM-T1105V1PL001		46 kg	
				Main T-Box Ass'y		3M-148549			
				REMARK					
				*.Premium Efficiency(IE3) *.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise					
SPARE PARTS									
				Date	DSND	CHKD	CHKD	APPD	
				2018-04-25	R.G. KIM	-	O.J. KIM	S.K. HAN	

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.

** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.

Type : **HLP-1.5/6**

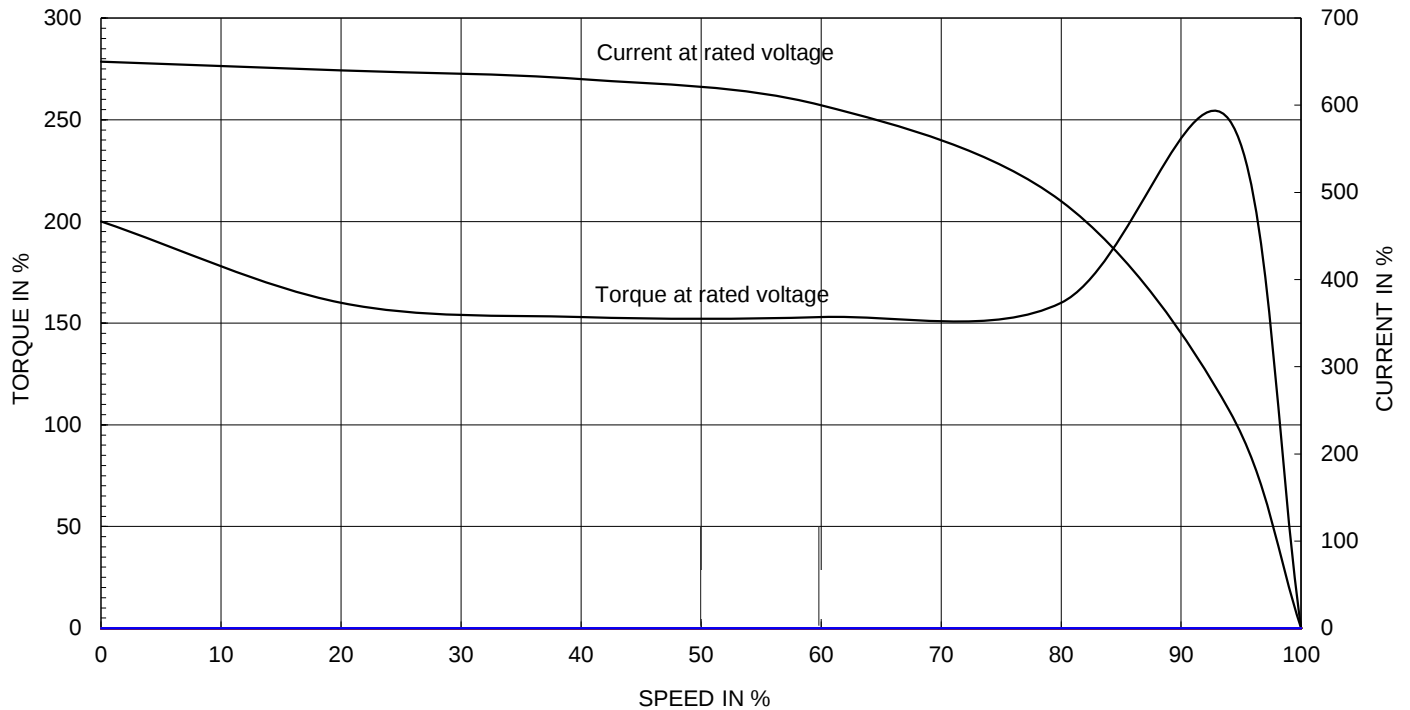
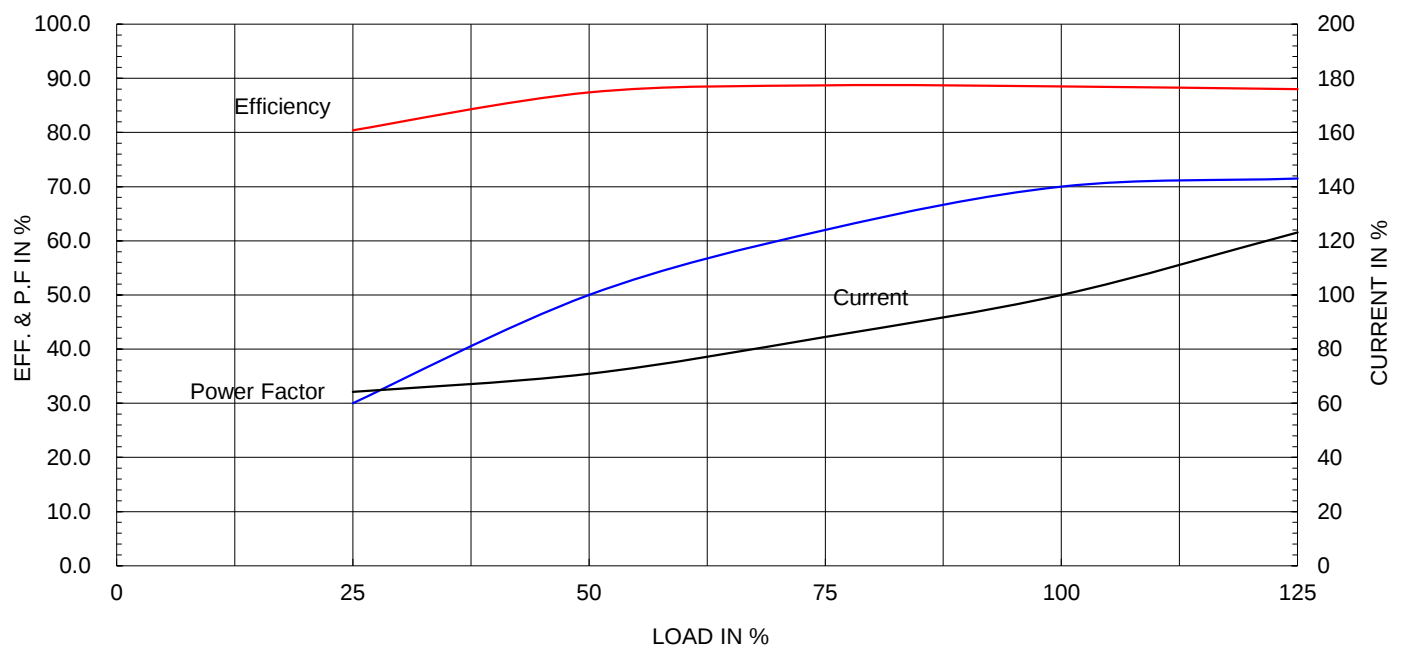
 Full Load Torque : **1.3** kg.m

 Motor moment of Inertia (J) : **0.009** kg.m²

 Load moment of Inertia (J) : **3.500** kg.m²
1.5 kW
6 P
60 Hz

 Speed at Full Load : **1155** RPM

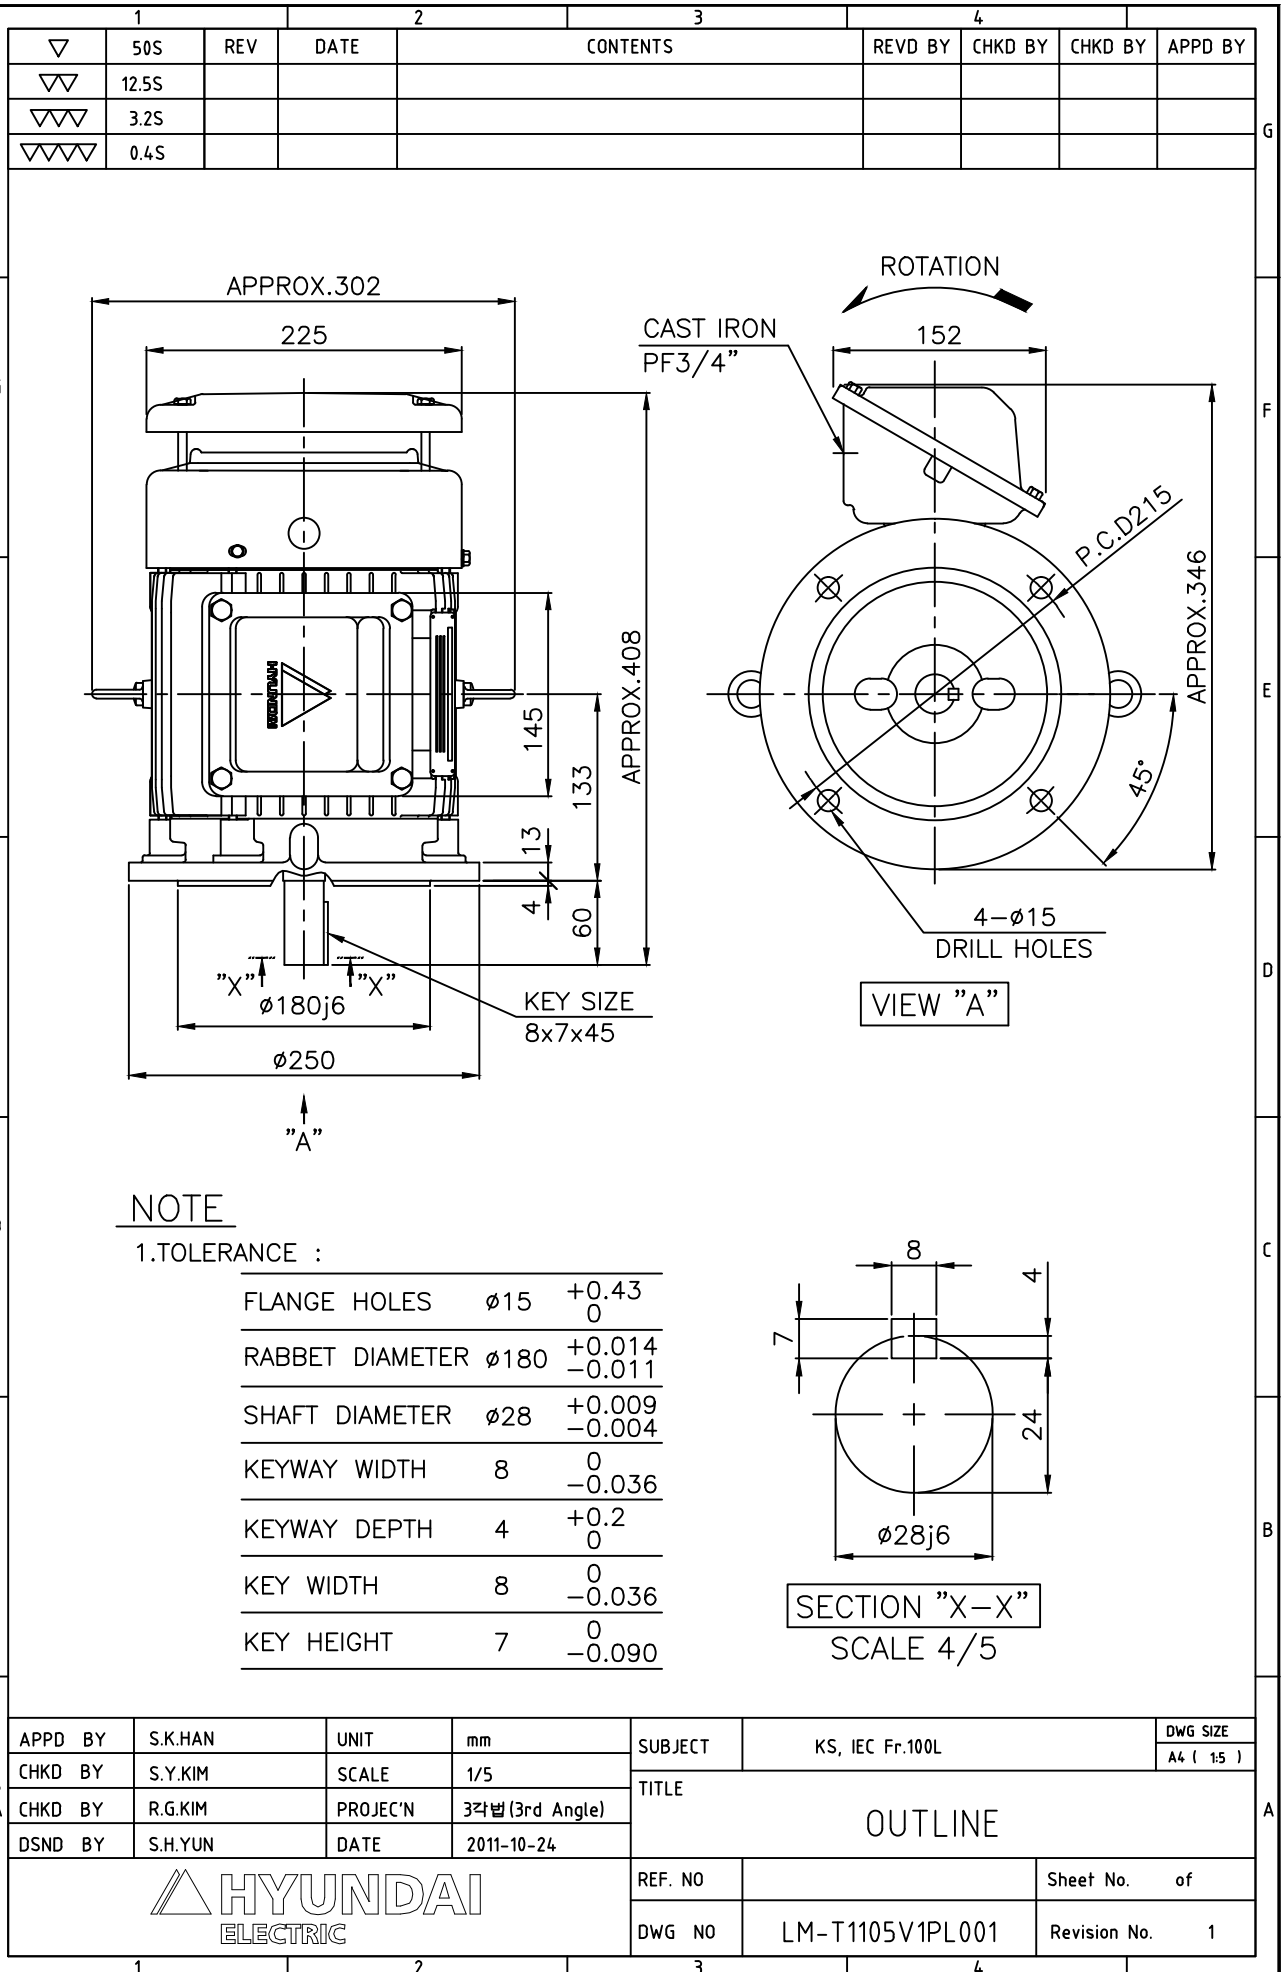
 Rated Voltage **440V**

 Full Load Current **3.2A**
SPEED VS TORQUE & CURRENT CURVE

OUTPUT VS EFF., P.F & CURRENT CURVE


THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC





▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

일반가공공차	일반재공공차
1-4 ±0.1	6-30 ±0.5
4-18 ±0.2	30-120 ±0.8
18-63 ±0.3	120-315 ±1.2
63-250 ±0.5	315-1000 ±2.0
250- ±0.8	1000- ±3.0

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN	UNIT	mm	SUBJECT	FR.100~132 (CAST IRON)	DWG SIZE	
CHKD BY	S.Y.KIM	SCALE	1/2	TITLE	Terminal Box Arrangement	A3 (1:2)	
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)	REF. NO	227B8004CB	Sheet No.	of
DSND BY	H.K.LEE	DATE	2011-10-26	DWG NO	3M-148549	Revision No.	2