


Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR

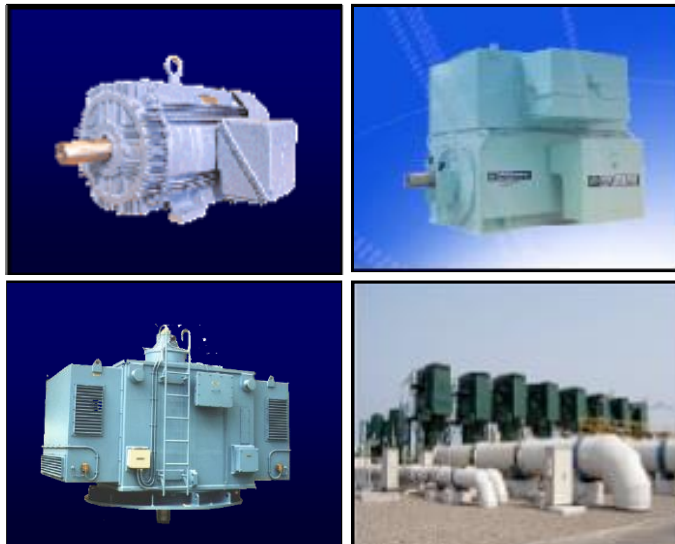

Contents

1 . Data Sheet of AC Induction Motor	- 1Sheets
2 . Speed-Torque & Current Curve	- 1Sheets
3 . Outline Dimension Drawing	- 1Sheets
4 . Main Terminal Box Drawing	- 1Sheets

		AC INDUCTION MOTOR DATA SHEET											
Model No.or RFQ No.		4406KSTD40SSDS1STFE3B31DL0SD3		Item No.			Rev. No.		[]				
Project Name				Project No.			Quantity						
GENERAL SPECIFICATION				PERFORMANCE DATA									
Frame Size		180L		Rated Output		30 kW		40 HP					
Type		HLP-30/4		Number of Poles		4							
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage							
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L		☐ Y-Δ					
Rated Frequency		60 Hz		Rated Voltage		440 V							
Number of Phases		3		Current		Full Load		51.0 A					
Insulation Class		☒ F ☐ B ☐ H				Locked-rotor**		725 %					
Temp. Rise at full load (by resistance method)				Efficiency									
at 1.0 S.F		80 deg. C				50% Load		93.8 %					
Motor Location		☒ Indoor ☐ Outdoor				75% Load		94.3 %					
Altitude		Less than 1000				100% Load		94.1 %					
Relative Humidity		Less than 80 %		Power Factor(p.u)									
Ambient Temp.		40 deg. C (Max.)				50% Load		0.735					
Duty Type		Continuous(S1)				75% Load		0.790					
Service Factor		1.15				100% Load		0.820					
Mounting		☒ B3 ☐ B5 ☐ V1 ☐ B3/B5		Speed at Full Load		1780 r.p.m							
Bearing	Type	Anti-Friction		Torque									
	DE/N-DE	6312ZZC3 / 6310ZZC3				Full Load		16.4 kg·m					
	Lubricant	Grease(Polyrex-EM)				Locked-rotor**		160 %					
External Thrust		Not applicable				Breakdown**		220 %					
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)									
Shaft Extension		☒ Single ☐ Double				Load(Max.)		17.248 kg·m²					
Terminal Box	Main	☐ Steel ☒ Cast Iron				Motor		0.190 kg·m²					
	Aux.	☐ Yes ☒ No				Sound Pressure Level (No-load & mean value at 1m from motor)							
	Location	Refer to Outline Drawing				77 dB(A)							
Application				Vibration		2.2 mm/sec (r.m.s)							
Area classification		Not applicable		Permissible number of consecutive starts		Cold		3 times					
Type of Ex-Protection		Non-Hazardous				Hot		2 times					
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)		Paint		Munsell No.		4.4PB5.5/5.6(VL-451)					
ACCESSORIES				SUBMITTAL DRAWING									
				Outline Dimension Drawing		\		Motor Weight(Approx.)					
				B3		LM-T1185B3PL001		186 kg					
				Main T-Box Ass'y		3M-145860							
				REMARK									
				*.Premium Efficiency(IE3) *.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise									
SPARE PARTS													
				Date		DSND		CHKD		CHKD		APPD	
				2018-04-25		R.G. KIM		-		O.J. KIM		S.K. HAN	

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.

** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.

HEES W230-131-1


* In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests.

A4(210mm X 297mm)


Type :	HLP-30/4	
Full Load Torque :	16.4	kg.m
Motor moment of Inertia (J) :	0.190	kg.m ²
Load moment of Inertia (J) :	17.248	kg.m ²

30 kW	4 P	60 Hz
Speed at Full Load : 1780 RPM		
Rated Voltage	440V	
Full Load Current	51.0A	

SPEED VS TORQUE & CURRENT CURVE

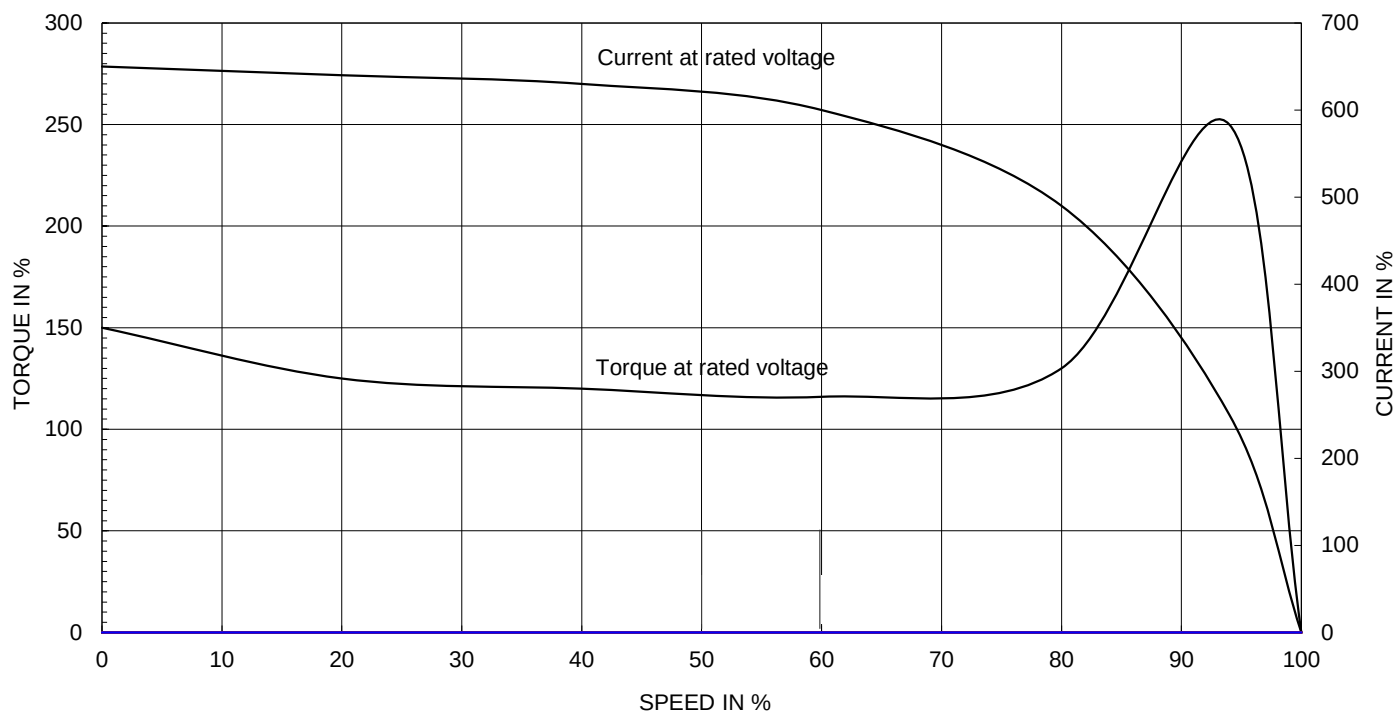


OUTPUT VS EFF., P.F & CURRENT CURVE

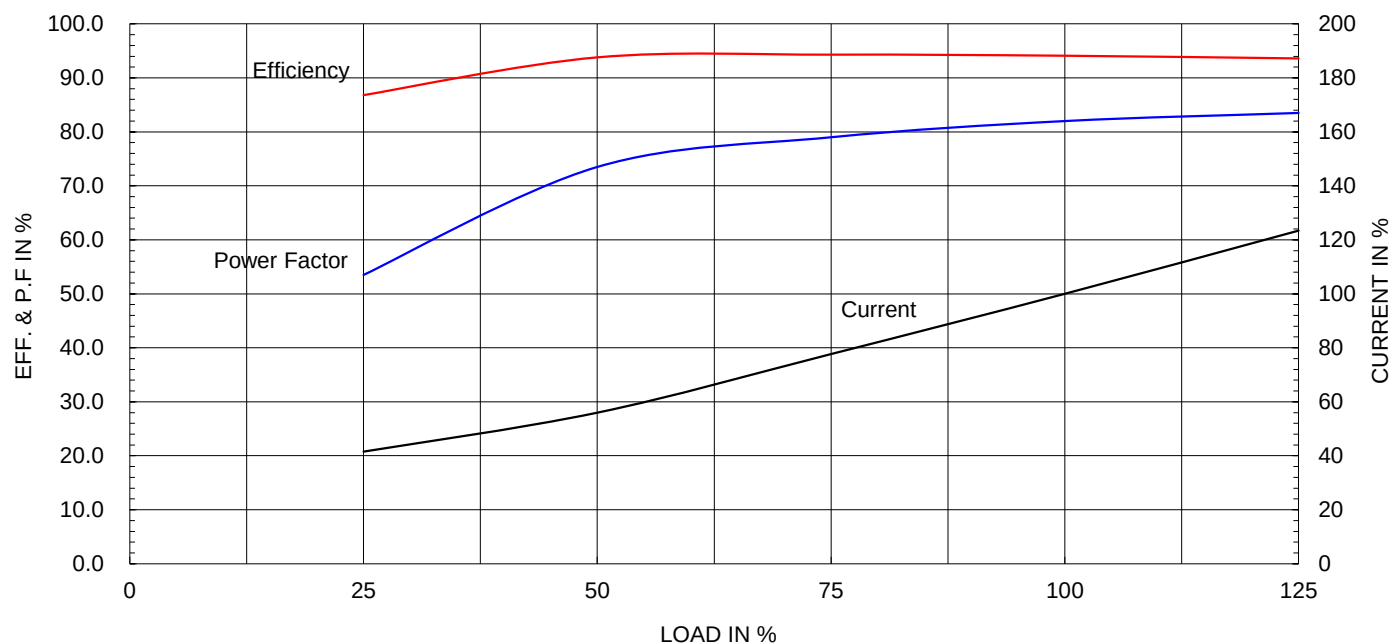

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)



HYUNDAI
ELECTRIC

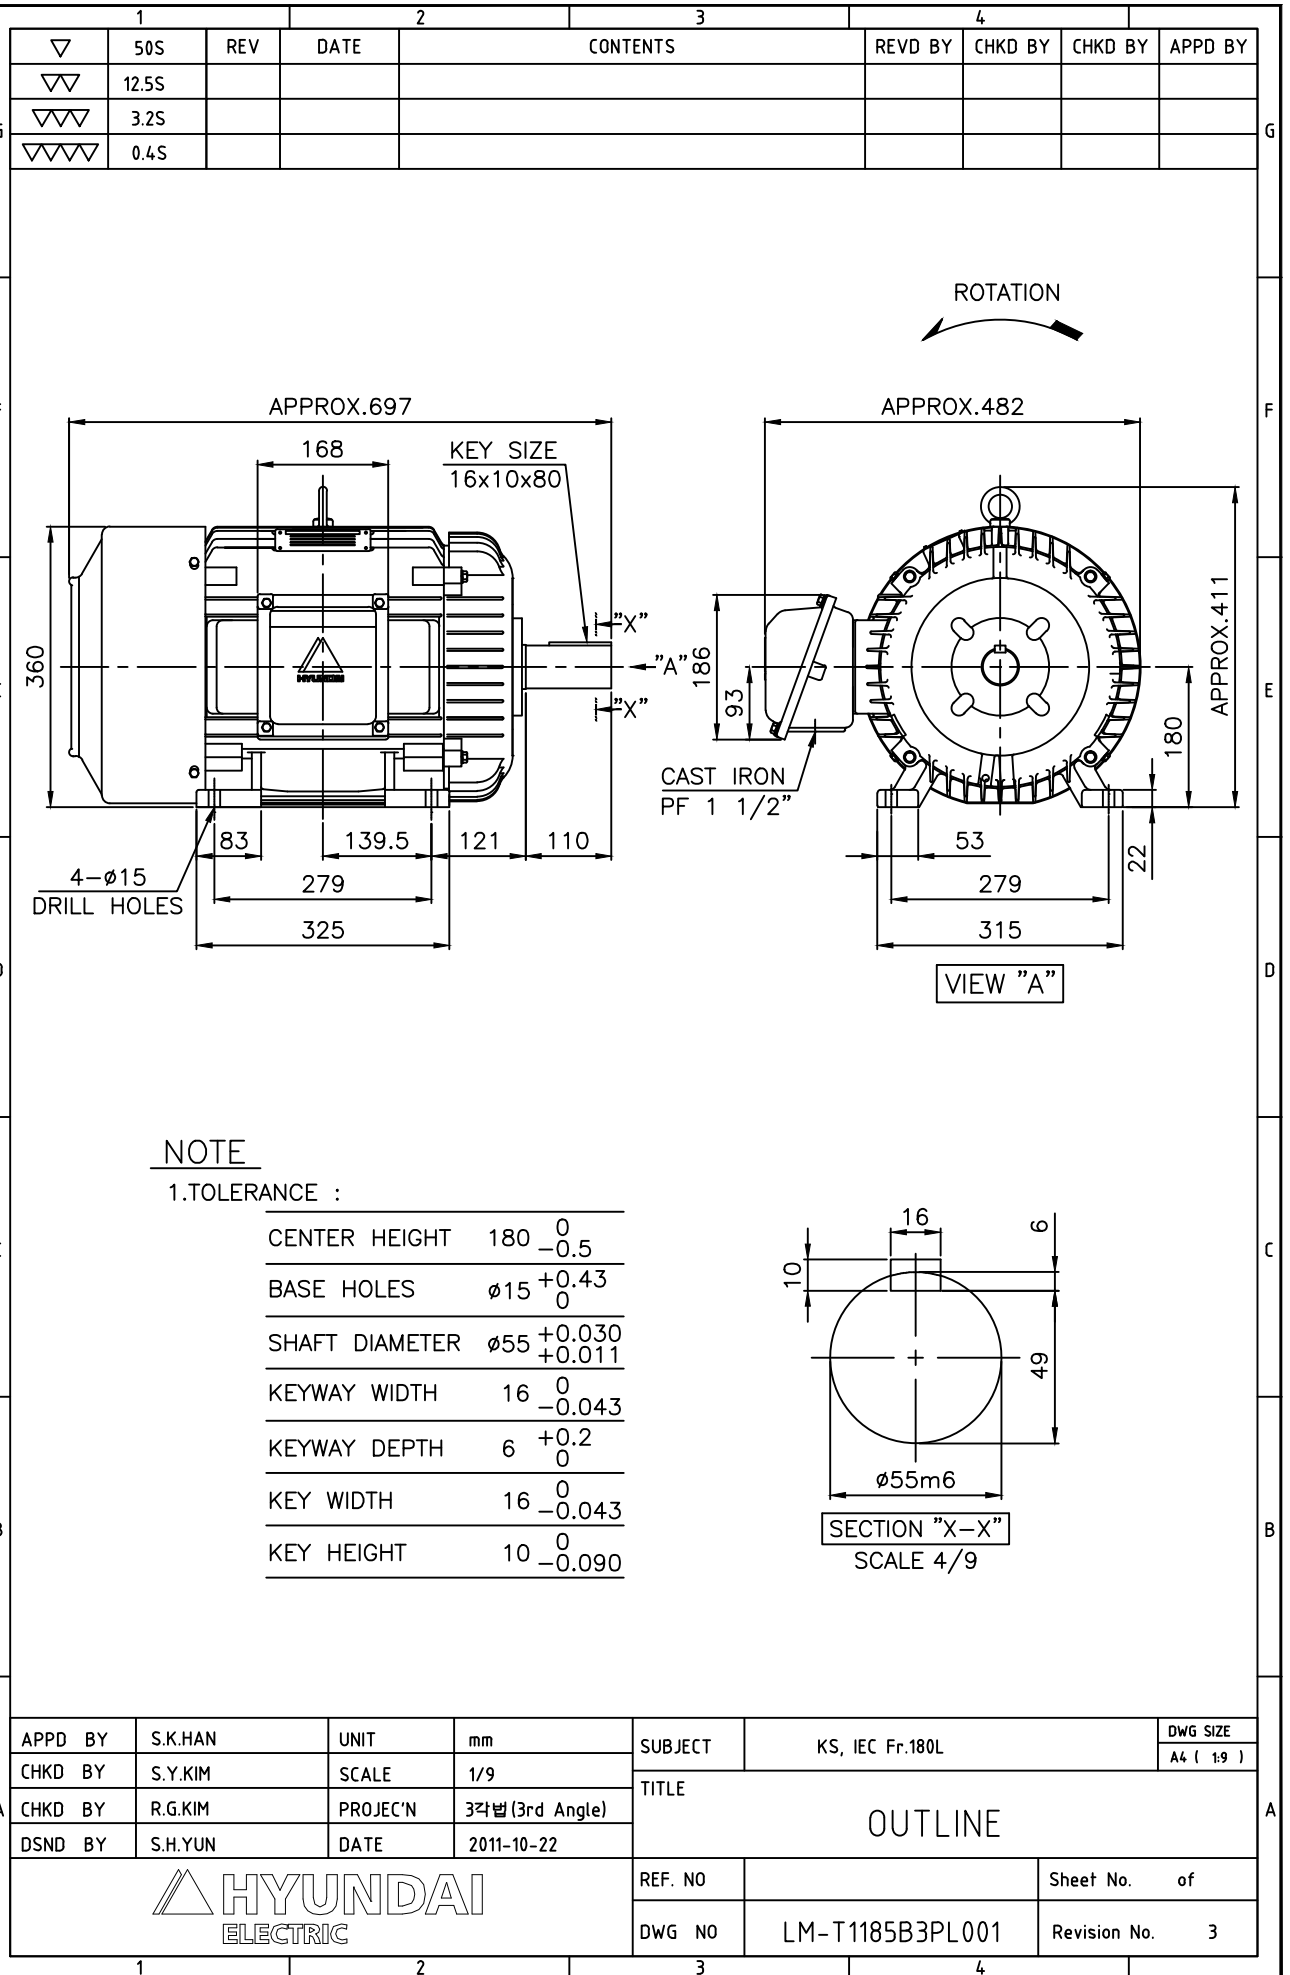

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC

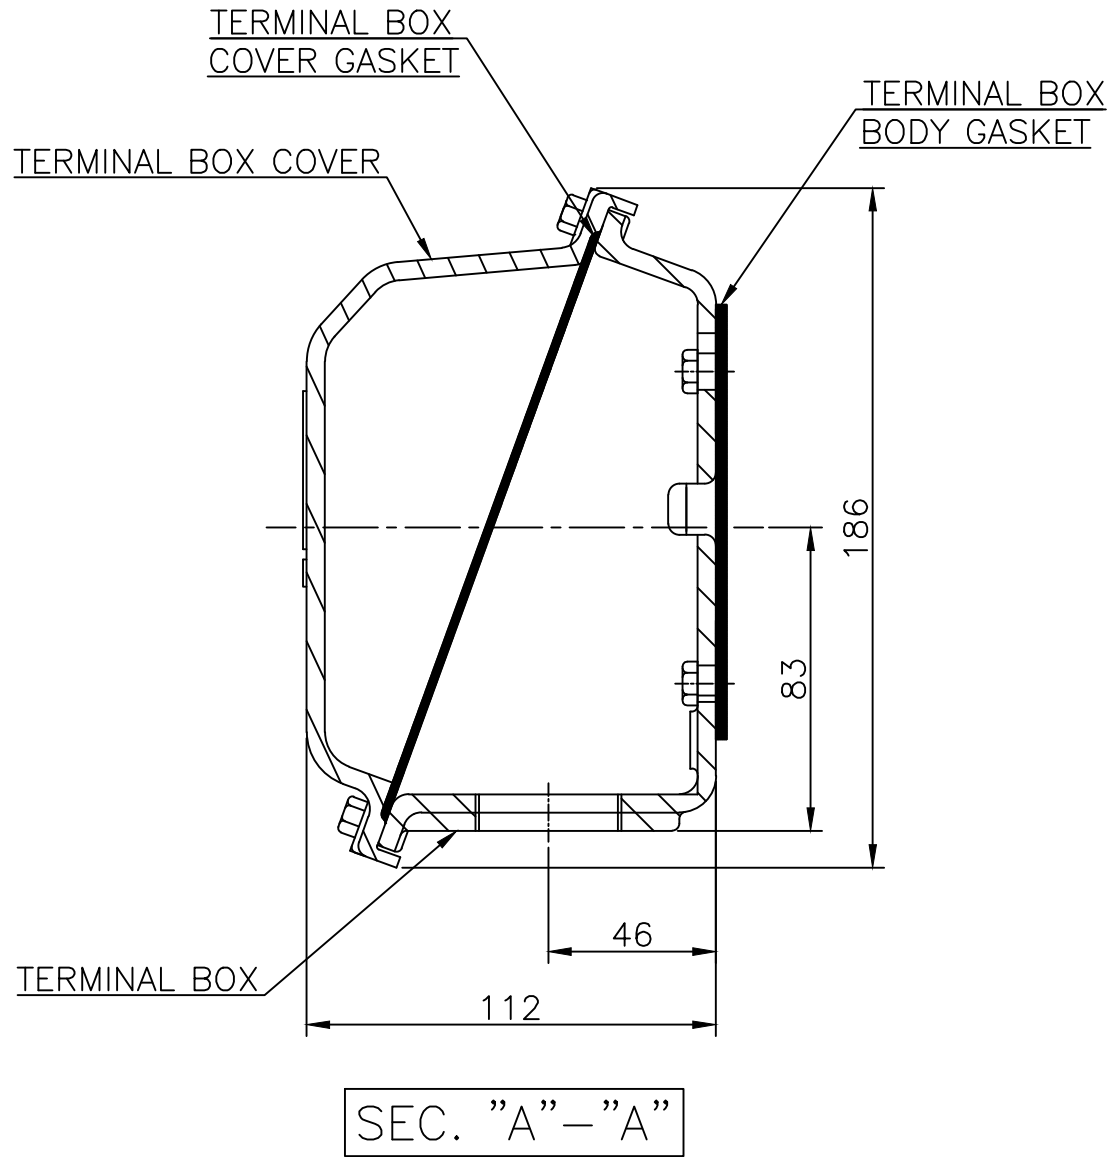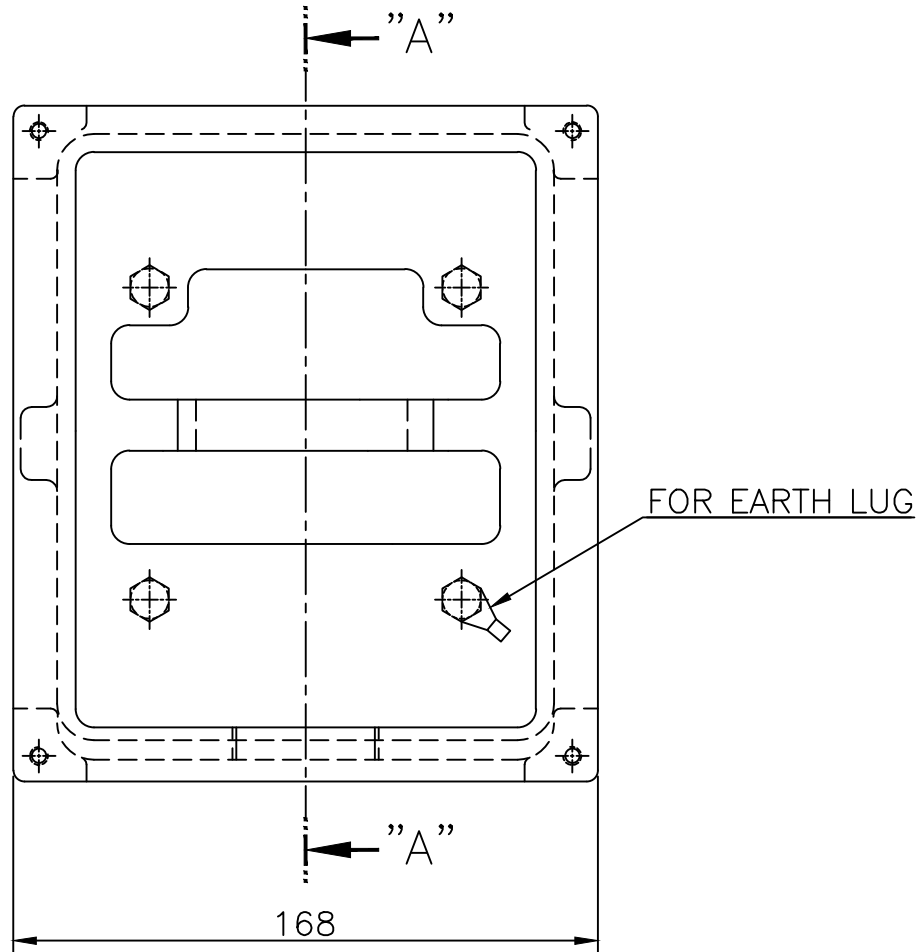

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY
1						
2						
3						
4						

일반가공공차				일반재관공차			
1-4	±0.1	6-30	±0.5	1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8	4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2	18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0	63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0	250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN		UNIT	mm	SUBJECT	FR.160~180 (CAST IRON)	DWG SIZE	
CHKD BY	S.Y.KIM		SCALE	1/2			A3 (1:2)	
CHKD BY	R.G.KIM		PROJEC'N	3각법 (3rd Angle)	TITLE Main Terminal Box Assembly			
DSND BY	H.K.LEE		DATE	2011-08-30				
					REF. NO	227B8008LA2	Sheet No.	of
					DWG NO	3M-145860	Revision No.	2
6		7		8		9		