

		DATA SHEET of AC INDUCTION MOTOR				60 HP - 8 P TE		
						DESIGN NO : KS C4202-1996		
Model No.or RFQ No.		Item No.		Rev. No.		[0]		
Project Name		Project No.		Quantity :				
GENERAL SPECIFICATION				PERFORMANCE DATA				
Frame No.		250M		Output		60 HP 45 KW		
Type		TNB		Poles		8 P		
Enclosure(Protection)		Totally Enclosed (IP IP54)		Rotor Type		Squirrel Cage		
Cooling Method		IC411(FC)		Starting Method(*)		☒ D.O.L. ☐ Y-Δ		
Frequency		60 Hz		Rated Voltage		440 V 380 V 220 V		
Phase		3 Φ		Current		Rated Load		
Insulation Class		☒ F ☐ B ☐ H				Start'g-D.O.L.		
Temp. Rise at full load (by resistance method)				Efficiency				
at 1.0 S.F		105 °C		50% Load		91.5 %		
Location		☐ Indoor ☐ Outdoor		75% Load		92.5 %		
Altitude		Less than 1000 meter		100% Load		92.5 %		
Humidity		Less than 80 %		Power Factor				
Ambient Temp.		40 °C (Max.)		50% Load		71.5 %		
Duty		CONT.(S1)		75% Load		76.5 %		
Service Factor		1.00		100% Load		80.0 %		
Electric Design		NEMA Design B		Speed at Rated Load		880 RPM / SLIP 2.22 %		
Construction		☐ B3 ☐ B5 ☐ V1 ☐		Torque (D.O.L)				
Bearing		Type		Anti-friction		Rated		
		DE/ODE		6316C3 \ 6313C3		Starting		
		Lubricant		GREASE(ALVANIA#2)		Break down		
External Thrust		Not applicable		Allowable Load GD ² referred to motor shaft				
Coupling Method		☒ Direct ☐ V-Belt				450.200 Kg.m ²		
Shaft Extension		☒ Single ☐ Double		Motor GD ²		8.260 Kg.m ²		
Terminal Box		Main		☐ Steel ☒ Cast Iron		Noise Level (dB(A))		
		Aux.		☐ Yes ☒ No		Vibration(Velocity)		
		Location		☒ Left ☐ Right		Starting Duty		
(Viewed from Drive End)				Paint		Munsell No. 4.0PB5.4/5.5(VL-451)		
Application				SUBMITTAL DRAWING				
Area Classification		Not applicable		Outline Dimension Drawing \ Motor Weight(Approx.)				
Applicable Standard		KS		☐ B3		TJ5MAP51		
Inspection and Performance Test		HHI Stand. Maker Test Report		☐ B5		TJ50BP51		
				☐ V1		TJ50PP51		
ACCESSORIES(OPTION ITEM)				Main T-Box Ass'y 3M-016882				
SPARE PARTS				REMARK				
Note: Others not mentioned in this specification shall be in accordance with HHI standard. Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.				Date	DSND	CHKD	CHKD	APPD
				2004.01.27	KIM R.G.		KIM O.J.	KANG K.G.



HYUNDAI

HEAVY INDUSTRIES CO., LTD

PERFORMANCE CURVE


CURVE NO.

P-TNBJ5M08045

TYPE :		
RATED TORQUE :	49.8	Kg.m
GD2 OF MOTOR :	8.3	Kg.m ²
(ALLOWABLE) GD2 OF LOA	450.2	Kg.m ²

45 kW	8 P	60 Hz
RATED SPEED :	880 RPM	
VOLTAGE	440V	380 V
RATED CURRENT	79.8A	92.4 A
		159.6A

SPEED VS TORQUE & CURRENT CURVE

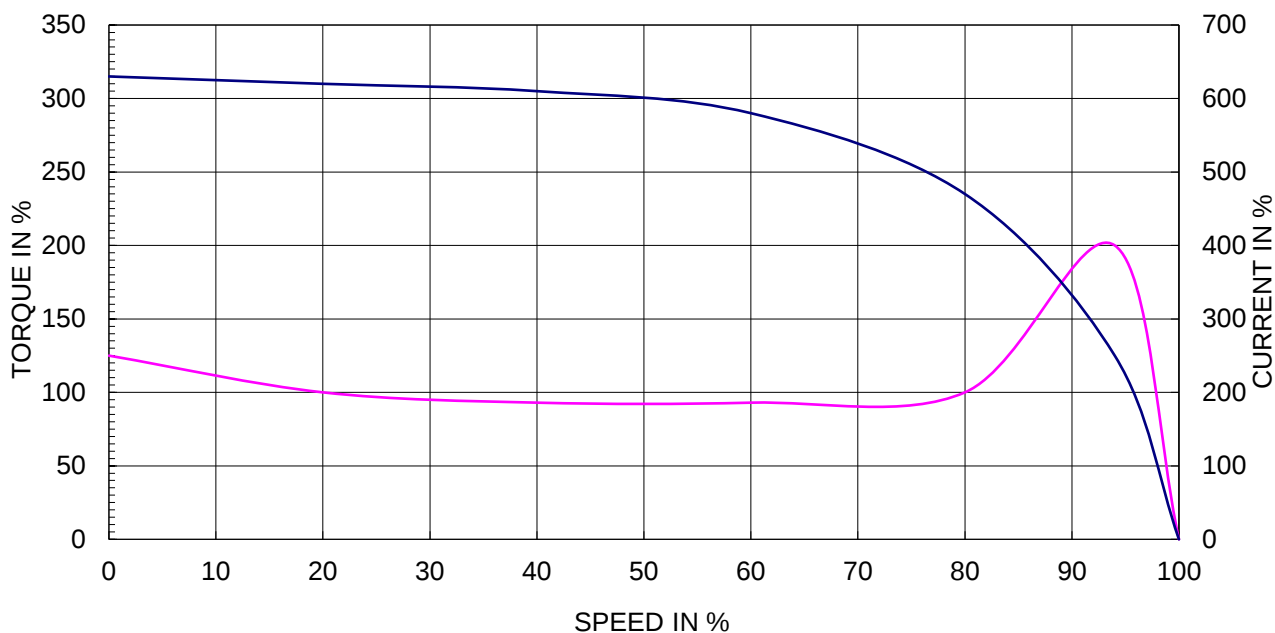

OUTPUT VS EFF., P.F & CURRENT CURVE

