



AC INDUCTION MOTOR DATA SHEET


| | | | | | | | | | | | | | |
|--|-----------|---|--|--|--|--|--|------|--|----------|--|---------|--|
| Model No.or RFQ No. | | Item No. | | Rev. No. | | [0] | | | | | | | |
| Project Name | | Project No. | | Quantity | | set | | | | | | | |
| GENERAL SPECIFICATION | | | | PERFORMANCE DATA | | | | | | | | | |
| Frame Size | | 100L | | Rated Output | | 1.5 kW 2 HP | | | | | | | |
| Type | | HLP-1.5/6 | | Number of Poles | | 6 | | | | | | | |
| Enclosure(Protection) | | Totally Enclosed (IP55) | | Rotor Type | | Squirrel Cage | | | | | | | |
| Method of Cooling | | IC411(FC) | | Starting Method* | | <input checked="" type="checkbox"/> D.O.L <input type="checkbox"/> Y-Δ | | | | | | | |
| Rated Frequency | | 60 Hz | | Rated Voltage | | 440 V 380 V 220 V | | | | | | | |
| Number of Phases | | 3 | | Current | | Full Load 3.2 A 3.7 A 6.4 A | | | | | | | |
| Insulation Class | | <input checked="" type="checkbox"/> F <input type="checkbox"/> B <input type="checkbox"/> H | | Locked-rotor** | | 790 % 790 % 790 % | | | | | | | |
| Temp. Rise at full load (by resistance method) | | | | Efficiency | | | | | | | | | |
| at 1.0 S.F | | 80 °C | | 50% Load | | 87.4 % | | | | | | | |
| Motor Location | | <input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor | | 75% Load | | 88.7 % | | | | | | | |
| Altitude | | Less than 1000m | | 100% Load | | 88.5 % | | | | | | | |
| Relative Humidity | | Less than 80 % | | Power Factor(p.u) | | | | | | | | | |
| Ambient Temp. | | 40 °C MAX. | | 50% Load | | 0.500 | | | | | | | |
| Duty Type | | Continuous(S1) | | 75% Load | | 0.620 | | | | | | | |
| Service Factor | | 1.15 | | 100% Load | | 0.700 | | | | | | | |
| Mounting | | <input checked="" type="checkbox"/> B3 <input type="checkbox"/> B5 <input type="checkbox"/> V1 <input type="checkbox"/> B3/B5 | | Speed at Full Load | | 1155 r.p.m | | | | | | | |
| Bearing | Type | Anti-Friction | | Torque | | | | | | | | | |
| | DE/N-DE | 6206ZZC3 / 6206ZZC3 | | Full Load | | 1.3 kg.m | | | | | | | |
| | Lubricant | Grease(SML4) | | Locked-rotor** | | 170 % | | | | | | | |
| External Thrust | | Not applicable | | Breakdown** | | 220 % | | | | | | | |
| Coupling Method | | <input checked="" type="checkbox"/> Direct <input type="checkbox"/> V-Belt | | Moment of Inertia (J) | | | | | | | | | |
| Shaft Extension | | <input checked="" type="checkbox"/> Single <input type="checkbox"/> Double | | Load(Max.) | | 3.162337662 kg·m ² | | | | | | | |
| Terminal Box | Main | <input type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast Iron | | Motor | | 0.009 kg·m ² | | | | | | | |
| | Aux. | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No | | Sound Pressure Level (No-load & mean value at 1m from motor) | | | | | | | | | |
| | Location | Refer to Outline Drawing | | 53 dB(A) | | | | | | | | | |
| Application | | | | Vibration | | | | | | | | | |
| Area classification | | Non-Hazardous | | 1.6 mm/sec(r.m.s) | | | | | | | | | |
| Type of Ex-Protection | | Not applicable | | Permissible number of consecutive starts | | Cold 3 times | | | | | | | |
| Applicable Standard | | KS, IEC, NEMA MG1 Part30(Vpeak) | | Hot | | 2 times | | | | | | | |
| | | | | Paint | | Munsell No. Panton279C | | | | | | | |
| ACCESSORIES | | | | SUBMITTAL DRAWING | | | | | | | | | |
| | | | | Outline Dimension Drawing | | Motor Weight(Approx.) | | | | | | | |
| | | | | B3 | | LM-T0105B3PLV01 41 kg | | | | | | | |
| | | | | B5 | | kg | | | | | | | |
| | | | | V1 | | kg | | | | | | | |
| | | | | B3/B5 | | kg | | | | | | | |
| | | | | Main T-Box Ass'y | | 3M-148549 | | | | | | | |
| | | | | | | | | | | | | | |
| REMARK | | | | | | | | | | | | | |
| | | | | * .Premium Efficiency(IE3) | | | | | | | | | |
| | | | | * .For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise | | | | | | | | | |
| | | | | | | | | | | | | | |
| SPARE PARTS | | | | | | | | | | | | | |
| | | | | Date | | DSND | | CHKD | | CHKD | | APPD | |
| | | | | 2018-11-23 | | R.G. KIM | | --- | | O.J. KIM | | S.K.HAN | |

Note: Others not mentioned in this data sheet shall be in accordance with maker standard. Made in Vietnam
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.

본 도면은 현대일렉트릭(주) 재산이므로 허가없이 복사할 수 없음 (취급유의)

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.


| | | | | | | | | |
|------|-------|-----|------|----------|---------|---------|---------|---------|
| ▽ | 50S | REV | DATE | CONTENTS | REVD BY | CHKD BY | CHKD BY | APPD BY |
| ▽▽ | 12.5S | | | | | | | |
| ▽▽▽ | 3.2S | | | | | | | |
| ▽▽▽▽ | 0.4S | | | | | | | |

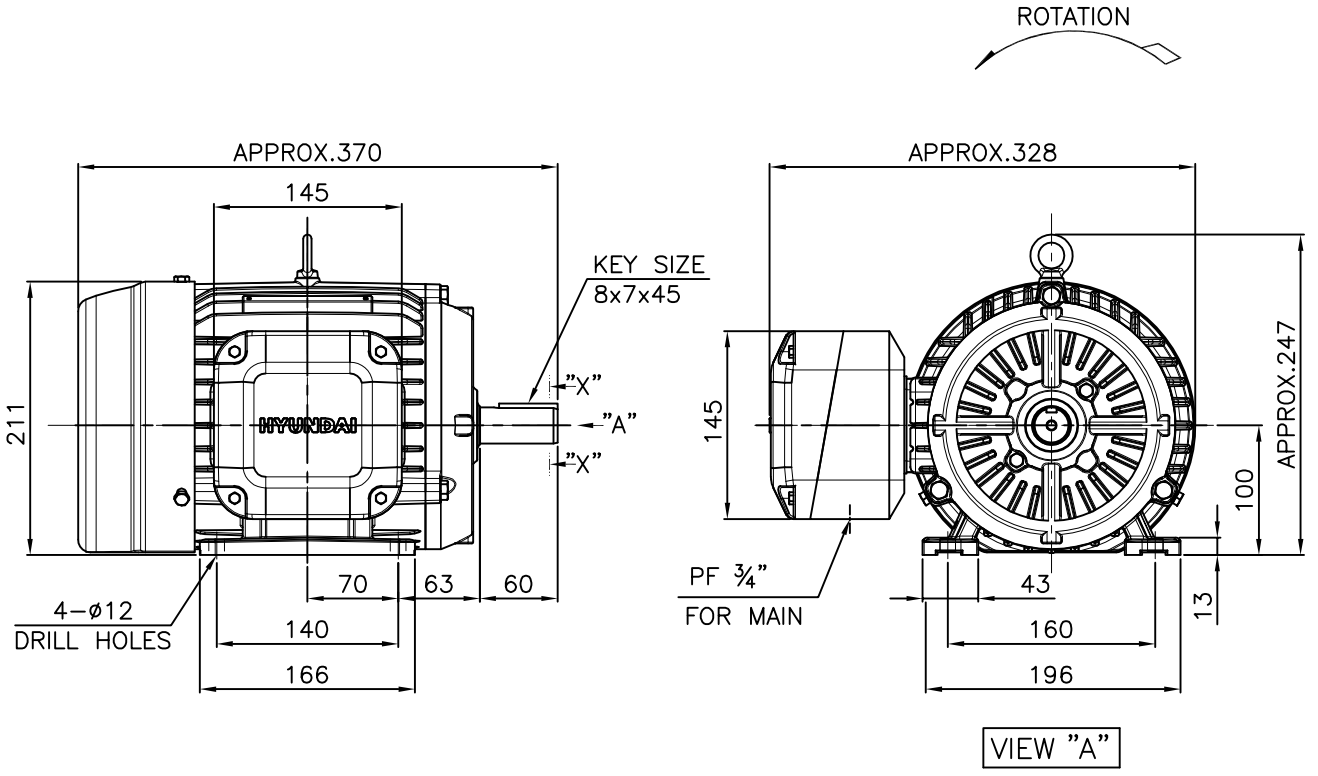

NOTE

1.TOLERANCE :

| | | |
|----------------|-----------|--|
| CENTER HEIGHT | 100 | $\begin{matrix} 0 \\ -0.5 \end{matrix}$ |
| BASE HOLES | $\phi 12$ | $\begin{matrix} +0.43 \\ 0 \end{matrix}$ |
| SHAFT DIAMETER | $\phi 28$ | $\begin{matrix} +0.009 \\ -0.004 \end{matrix}$ |
| KEYWAY WIDTH | 8 | $\begin{matrix} 0 \\ -0.036 \end{matrix}$ |
| KEYWAY DEPTH | 4 | $\begin{matrix} +0.2 \\ 0 \end{matrix}$ |
| KEY WIDTH | 8 | $\begin{matrix} 0 \\ -0.036 \end{matrix}$ |
| KEY HEIGHT | 7 | $\begin{matrix} 0 \\ -0.090 \end{matrix}$ |

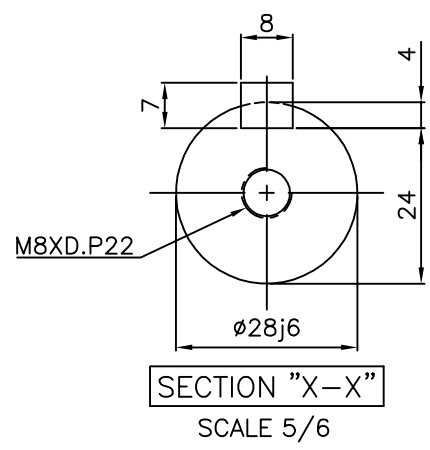

| | | | | | | | |
|---------|---------|----------|----------------|---------|-----------------|--------------|------------|
| APPD BY | S.K.HAN | UNIT | mm | SUBJECT | KS, IEC Fr.100L | DWG SIZE | A4 (1:6) |
| CHKD BY | S.Y.KIM | SCALE | 1/6 | | | TITLE | OUTLINE |
| CHKD BY | I.K.KIM | PROJEC'N | 3각법(3rd Angle) | REF. NO | | Sheet No. | of |
| DSND BY | S.H.LEE | DATE | 2019.06.18 | DWG NO | LM-T1105B3PLV01 | Revision No. | 0 |