

AC INDUCTION MOTOR DATA SHEET


Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	200LL		Rated Output	30 kW 40 HP			
Type	HL-XP		Number of Poles	6			
Enclosure(Protection)	Explosion Proof (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	<input checked="" type="checkbox"/> D.O.L <input type="checkbox"/> Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	52.3 A 60.5 A 104.5 A		
Insulation Class	<input checked="" type="checkbox"/> F <input type="checkbox"/> B <input type="checkbox"/> H		Locked-rotor**	650 %	650 % 650 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 92.5 %				
Motor Location <input checked="" type="checkbox"/> Indoor <input type="checkbox"/> Outdoor			75% Load 93.5 %				
Altitude Less than 1000 meter			100% Load 93.0 %				
Relative Humidity Less than 80 %			Power Factor(p.u)				
Ambient Temp. 40 deg. C (Max.)			50% Load 0.710				
Duty Type Continuos (S1)			75% Load 0.785				
Service Factor 1.00			100% Load 0.810				
Mounting <input type="checkbox"/> B3 <input checked="" type="checkbox"/> B5 <input type="checkbox"/> V1 <input type="checkbox"/> B3/B5			Speed at Full Load 1175 r.p.m				
Bearing	Type	Anti-Friction		Torque			
	DE/N-DE	6313ZC3 / 6211ZC3		Full Load 24.9 kg·m			
	Lubricant	Grease(Gadus S2 V100 2)		Locked-rotor** 170 %			
External Thrust Not applicable			Breakdown** 220 %				
Coupling Method <input checked="" type="checkbox"/> Direct <input type="checkbox"/> V-Belt			Moment of Inertia (J)				
Shaft Extension <input checked="" type="checkbox"/> Single <input type="checkbox"/> Double			Load(Max.) 50.000 kg·m ²				
Terminal Box	Main	<input type="checkbox"/> Steel <input checked="" type="checkbox"/> Cast Iron		Motor 0.380 kg·m ²			
	Aux.	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		Sound Pressure Level (No-load & mean value at 1m from motor)			
Location Refer to Outline Drawing			70 dB(A)				
Application			Vibration 2.2 mm/sec (r.m.s)				
Area classification Hazardous			Permissible number of consecutive starts				
Type of Ex-Protection Ex d IIB T4			Cold 3 times				
Applicable Standard KS,IEC			Hot 2 times				
			Paint Munsell No. 4.0PB5.4/5.5(VL-451)				
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3		kg		
			B5	227B1626XI10	400 kg		
			V1		kg		
			B3/B5	0	0 kg		
			Main T-Box Ass'y 227B1470LA				
SPARE PARTS			REMARK				
			High Efficiency				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.


Type	:	HL-XP
Full Load Torque	:	24.9 Kg.m
Motor moment of Inertia (J)	:	0.380 Kg.m ²
Load moment of Inertia (J)	:	50.000 Kg.m ²

30 kW	6 P	60 Hz	
Speed at Full Load :		1175 RPM	
Rated Voltage	440V	380V	220V
Full Load Current	52.3A	60.5A	104.5A

SPEED VS TORQUE & CURRENT CURVE

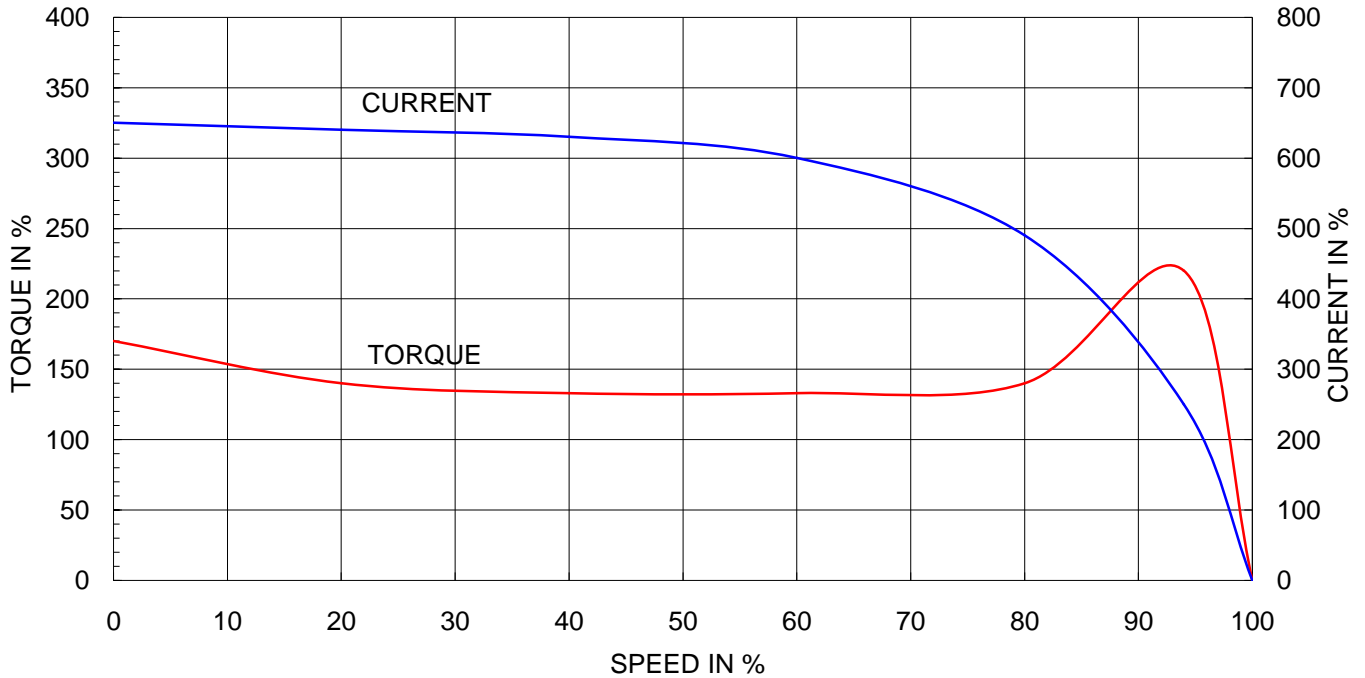

OUTPUT VS EFF., P.F & CURRENT CURVE

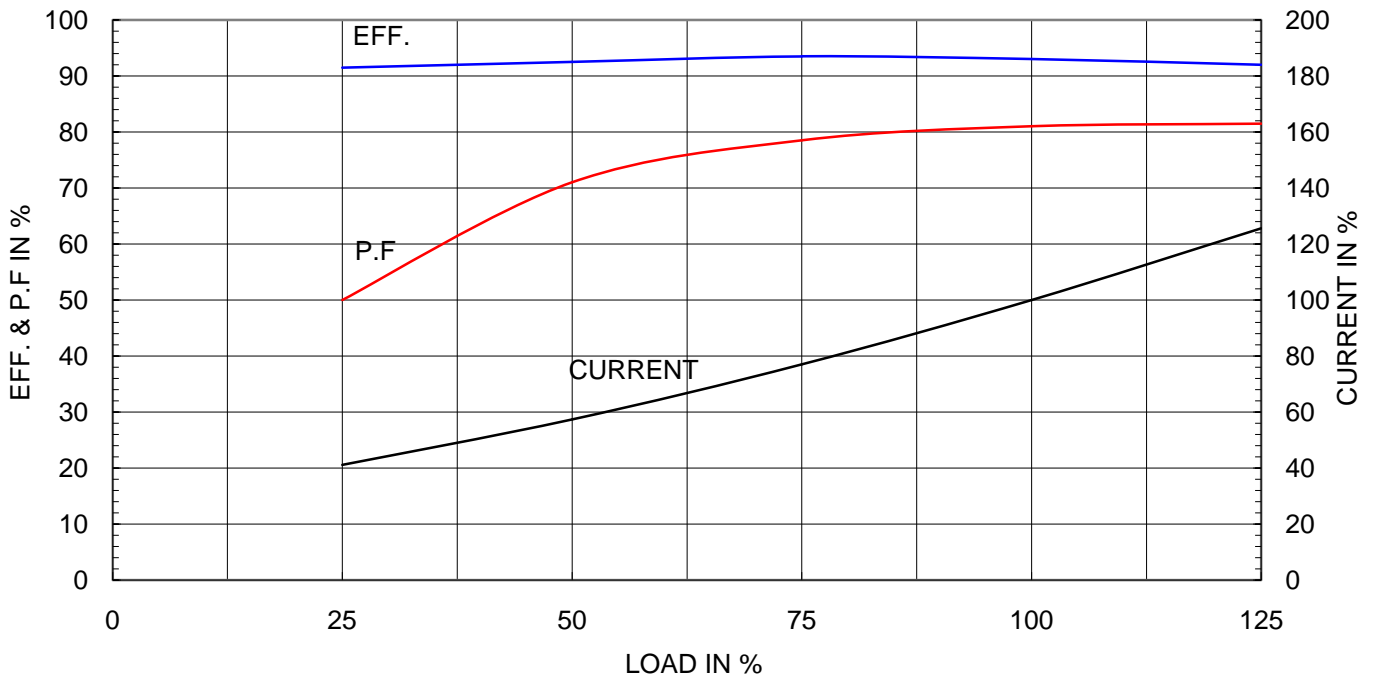





TEFC

THREE PHASE INDUCTION MOTOR

TYPE


HKS , HK
CAST IRON FRAME

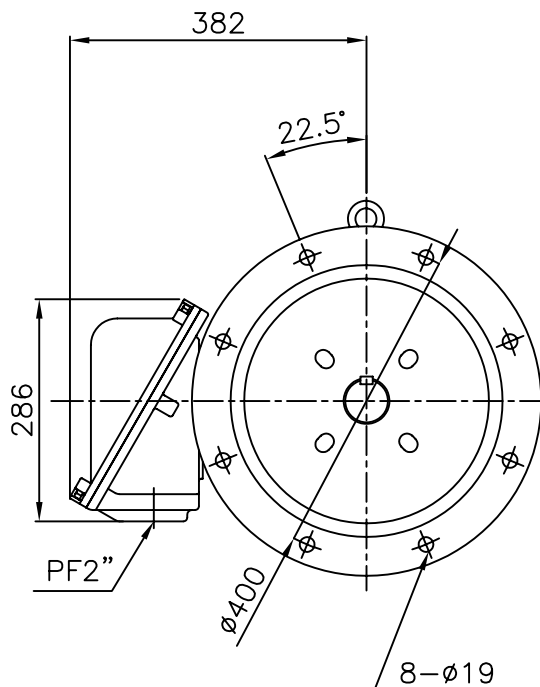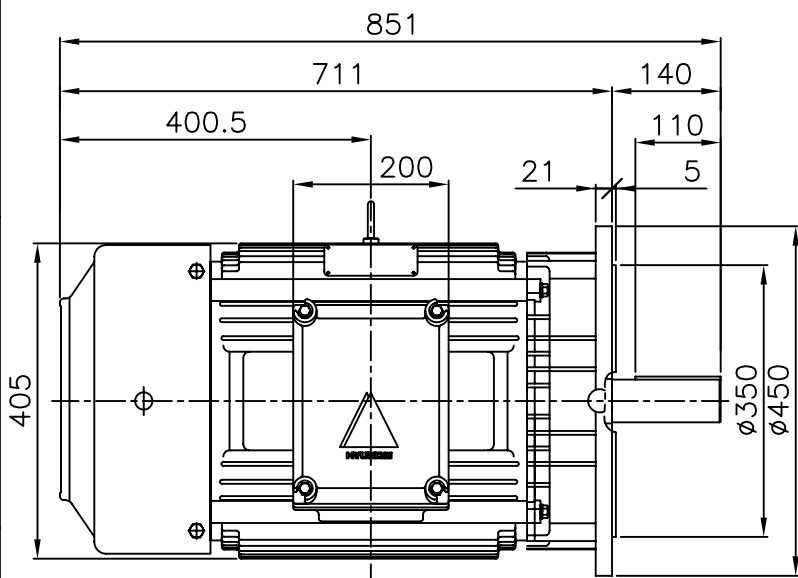

NOTE


1.TOLERANCE :

FLANGE HOLES	$\phi 19 \begin{matrix} +0.43 \\ -0. \end{matrix}$
RABBET DIAMETER	$\phi 350 \begin{matrix} +0.018 \\ -0.018 \end{matrix}$
SHAFT DIAMETER	$\phi 60 \begin{matrix} +0.030 \\ +0.011 \end{matrix}$
KEYWAY WIDTH	$18 \begin{matrix} +0 \\ -0.043 \end{matrix}$
KEYWAY DEPTH	$53 \begin{matrix} +0 \\ -0.2 \end{matrix}$


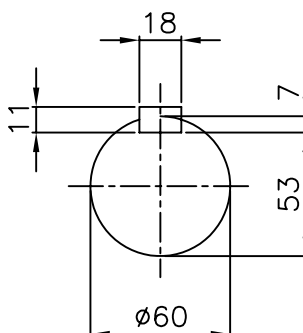


APPD BY	KIM.Y.S	UNIT	mm
CHKD BY	---	SCALE	1/10
CHKD BY	KO.S.H	PROJEC'N	3rd Angle
DSND BY	LEE KWANG SOO	DATE	2001. 3. 9

SUBJECT	XSD KS 200LL 4,6P	CAD PROJ \ FILE	
		XSDNKS\227B1626X110	
TITLE			
OUTLINE			

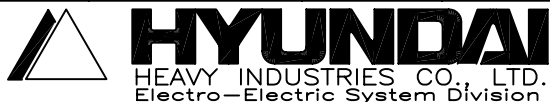

REF. NO	227B1626X110	Sheet No.	of
DWG NO	227B1626X110	Revision No.	0

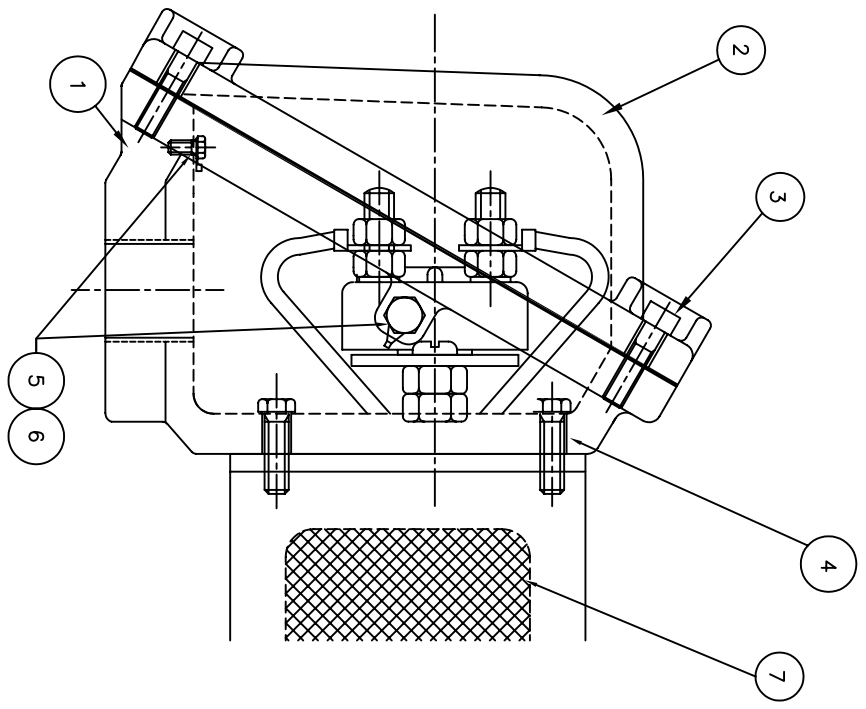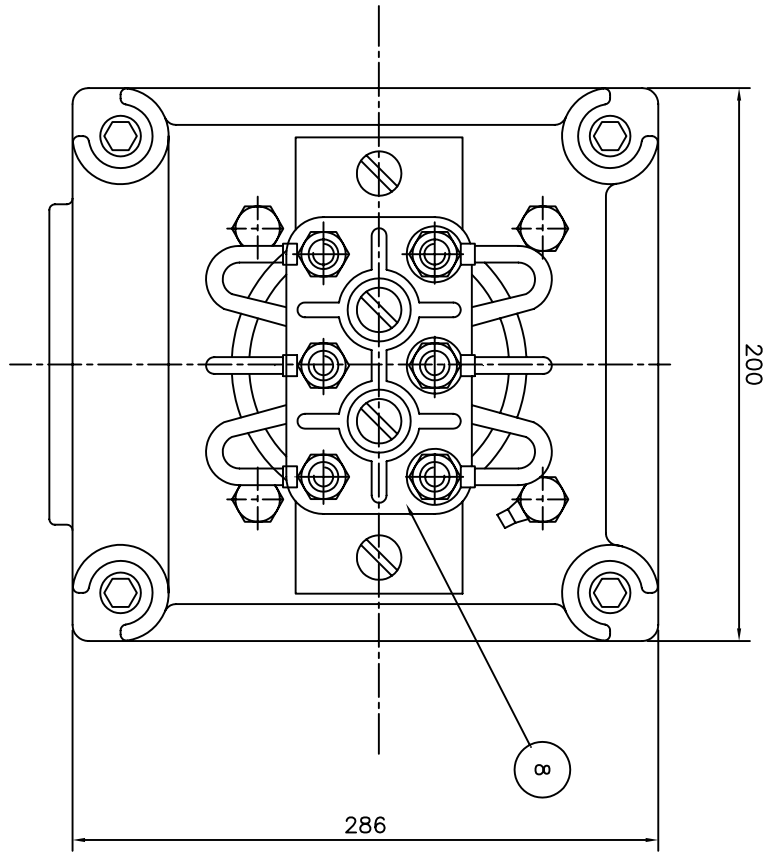

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
1	TERMINAL BLOCK	D4C29C					8
1	SEALING COMPOUND	CU					7
2	GRD. TERMINAL LUG	S45C					6
2	GRD. BOLT	S45C					5
4	T/B + FRAME BOLT	S45C					4
4	T/B + COVER BOLT	S45C					3
1	TERMINAL BOX COVER	FC15					2
1	TERMINAL BOX ASSEMBLY	FC15					1

APPD BY	UNIT	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
CHKD BY	SCALE	N/S					
CHKD BY	PROJEC'N	3*4# (3rd Angle)					
DSND BY	DATE	99.2.2					
DSND BY	LEE E.J.						
TITLE		MAIN TERMINAL BOX					
REF. NO	7B1470LA		SHEET NO.		0		
DWG NO	227B1470LA		Revision No.		0		

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY
1						
2						
3						
4						



HYUNDAI HEAVY INDUSTRIES CO. LTD.
ELECTRICAL ENGINEERING DIVISION